

# EVoline® Catalogue 2020



# Systems



**6**  
One



**13**  
Circle80



**16**  
Square80



**20**  
BackFlip



**23**  
Port *Push*



**28**  
Port



**34**  
FlipTop *Push*



**39**  
FrameDock



**42**  
Dock Square



**45**  
Dock



**50**  
R-Dock



**53**  
T-Dock



**56**  
V-Dock



**59**  
V-Port




**62**  
U-Dock



**65**  
Up



**68**  
Vertical



**71**  
Decentralised  
Electrical  
Distribution

# Modules



**74**  
Modules



**76**  
Sockets




**85**  
Power Supply  
Modules



**88**  
Data  
Modules



**90**  
Multimedia  
Modules



**97**  
Switches &  
Pushbuttons



**99**  
Protection  
Modules



**101**  
Interchangeable  
Modules



**113**  
Kinetics

# Add-On



**114**  
Plug



**117**  
Qi Charger



**119**  
Express



**132**  
Cable  
Management



**137**  
Accessories




**140**  
Sales support

# Example of order


## How to configure your individual EVoline product

### 1. Choose your EVoline product


Port  
→ 33




Port Push  
→ 27




Dock Square  
→ 44



FlipTop Push  
→ 37







FrameDock  
→ 41







### 2. Make your choice of modules





Sockets  
→ 76







Data-Modules  
→ 88







Multimedia-Modules  
→ 90



Interchangeable Modules  
→ 88



Switches  
→ 97





Dock  
→ 49



R-Dock  
→ 52




U-Dock  
→ 64



V-Dock  
→ 58




Vertical  
→ 70

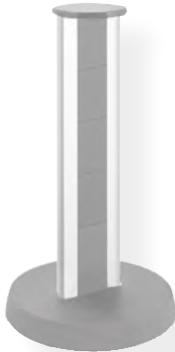

3. Your configuration

Protection-Modules  
→ 99



Kinetics-Modules  
→ 113





Power Supply-Modules  
→ 85





The new One electrification system from EVoline is a compact power or data access system that can be easily integrated into any design concept. Whether at the workplace, in the conference room, in the lounge area or in the kitchenette, the EVoline One ensures fast and secure access to power or data, and that to a very space-saving and discreet way.

The round single socket can be installed horizontally or vertically and can be adapted to the respective requirements thanks to the wide range of module inserts. In addition to the variable inserts, EVoline also offers the individually selectable rotary cover.

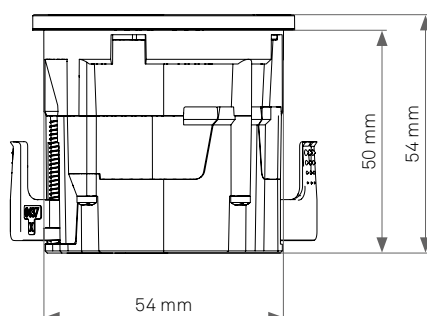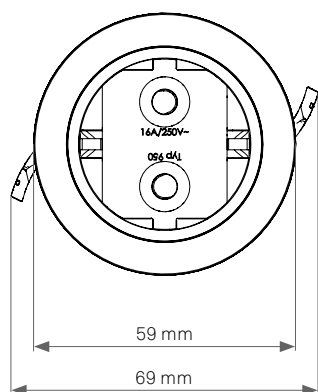


Case	Plastic
Ornament ring,	- Plastic, solid
Rotating lid	- Stainless Steel inserts
Installation type	Flush mounted
Plate thickness	9 – ∞ mm





Thanks to its specially designed upholstery collar, the EVoline One socket outlet is perfectly suited for installation in upholstered furniture. Whether it be a leather armchair or a fabric sofa, the EVoline One makes any upholstered piece of furniture a functional, modern eye-catcher.

The variably adjustable options like the upholstery collar and the clamping piece allow the EVoline One to be installed in furniture with flat or high upholstery and with any base structure thickness.

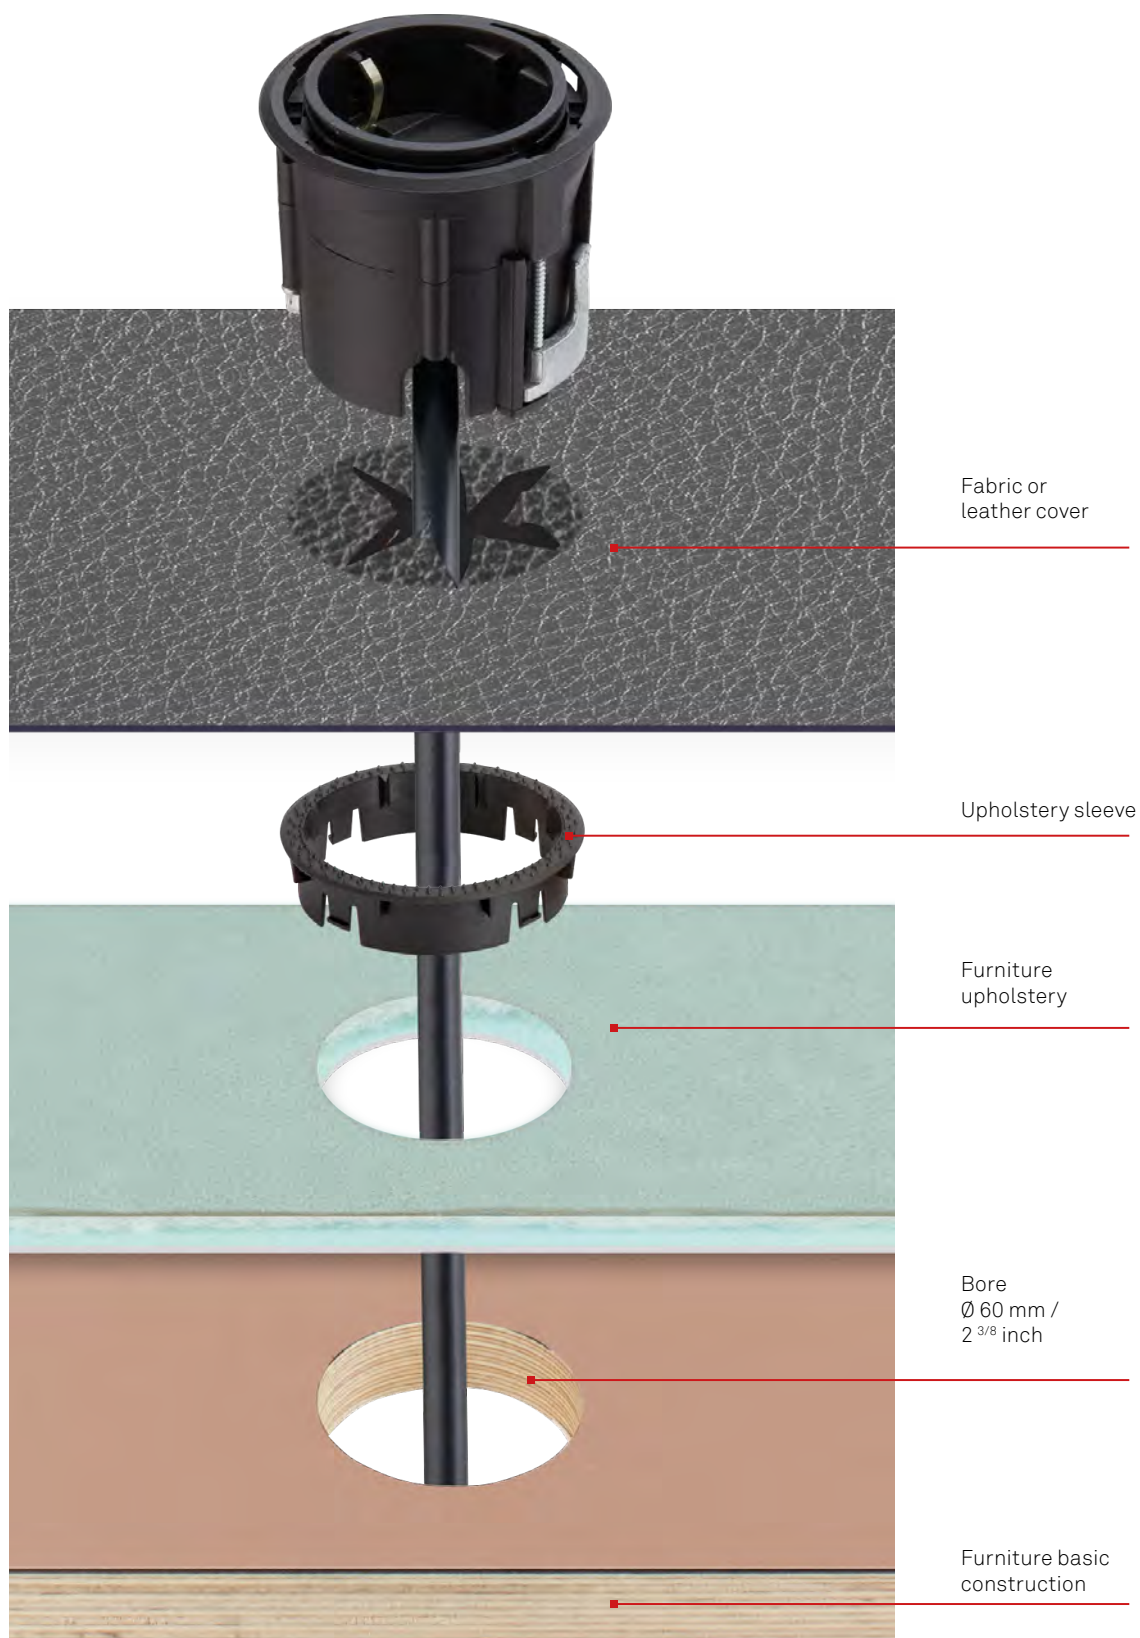




**Flat upholstery:** The flat upholstery collar is suited for installation in upholstered furniture with a maximum upholstery thickness of 5.5 mm. The short version of the clamping piece can be chosen depending on the thickness of the base structure.

**High upholstery:** The high upholstery collar has been specially designed for furniture with a higher upholstery. The circumferential spacers allow an installation in upholstery of up to 11 mm.



Upholstery  
Max. 5,5 mm

Base structure  
Min. 4,5 mm  
Max. 23,5 mm

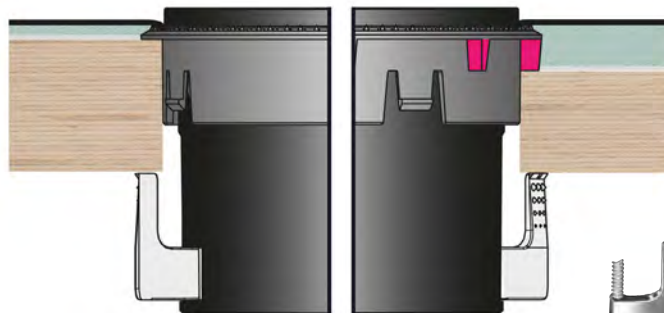

Upholstery  
Max. 11 mm


Base structure  
Min. 0,5 mm  
Max. 18 mm



Clamping wing

Upholstery  
Max. 5,5 mm

Base structure  
Min. 19 mm  
Max. 36,5 mm

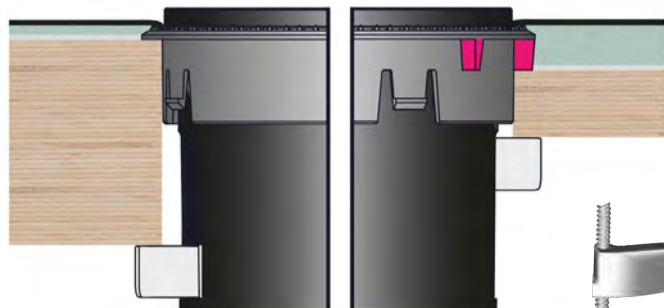


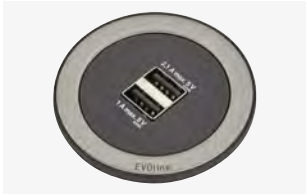






Upholstery  
Max. 11 mm







Base structure  
Min. 13,5 mm  
Max. 31 mm



Clamping wing, short

Description	Picture	Specifications	Order Number
<b>EVoline One with VDE-socket</b>  Housing made of plastic Clamping wing made of metal  VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug.		Housing color: black Ring color: black	1592 8000 0900
		Housing color: black Ring color: black with stainless steel inlay	1592 8000 1100
		Housing color: white Ring color: white	1592 8000 4300
		Housing color: white Ring color: white with stainless steel inlay	1592 8000 6100
<b>EVoline One with VDE-socket and lid</b>  Housing and lid made of plastic Clamping wing made of metal  VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug.		Housing color: black Lid color: black	1592 8000 4100
		Housing color: black Lid color: black with stainless steel inlay	1592 8000 3900
		Housing color: white Lid color: white	1592 8000 4200
		Housing color: white Lid color: white with stainless steel inlay	1592 8000 6200

Description	Picture	Specifications	Order Number
<b>EVoline One with double USB Charger</b>  Housing made of plastic Clamping wing made of metal  Double USB Charger Type A, 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug.		Housing color: black Ring color: black	1592 8000 1200
		Housing color: black Ring color: black with stainless steel inlay	1592 8000 1400
		Housing color: white Ring color: white	1592 8000 1300
		Housing color: white Ring color: white with stainless steel inlay	1592 8000 6300
<b>EVoline One with double USB Charger and lid</b>  Housing and lid made of plastic Clamping wing made of metal  Double USB Charger Type A, 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug.		Housing color: black Lid color: black	1592 8000 4400
		Housing color: black Lid color: black with stainless steel inlay	1592 8000 4000
		Housing color: white Lid color: white	1592 8000 4500
		Housing color: white Lid color: white with stainless steel inlay	1592 8000 6400

Description	Picture	Specifications	Order Number
<b>Configurable Basic Housing EVoline One</b>  Housing made of plastic Clamping wing made of metal  Please state the following in your purchase order: Clamping wing: for mounting surface thickness of 9mm to 25mm Clamping wing, short: for mounting surface thickness of 21mm to 38mm		<b>Housing</b>  black, for electricity  black, for data  white, for electricity  white, for data	9332 3280 0000  9332 3590 0000  9332 3290 0000  9332 3600 0000
<b>EVoline One ring</b>		black / white with stainless steel insert Please indicate the colour when ordering	9332 3520 0000
		black / white Please indicate the colour when ordering	9332 3510 0000
<b>EVoline One ring with lid</b>		black / white with stainless steel insert Please indicate the colour when ordering	9332 3560 0000
		black / white Please indicate the colour when ordering	9332 3550 0000
<b>EVoline upholstery sleeve</b>  Additional fixing sleeve for installation in an upholstered piece of furniture		Flat upholstery sleeve (Upholstery thickness of up to 5,5 mm max.)  High upholstery sleeve (Upholstery thickness of up to 11 mm max.)	9332 3490 0000  9332 3500 0000



# EVoline® Circle80




The EVoline Circle80 intelligently combines three functions into one: a power outlet, a double USB charger and a cable duct.

A combination that provides not only a safe electricity supply but also a flexible option for data cables thanks to an additional cable duct opening.


With its slim design, the EVoline Circle80 presents itself as a real eye-catcher and elegantly hides excess cables with its practical cable duct.

The flexible installation solution can be integrated into tabletops or benches in almost all office areas ranging from conference rooms to lounges.

Furthermore, the small installation depth and the EVoline cable fixing system ensure easy and quick installation.





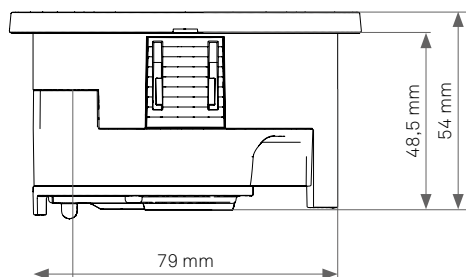


Dimensions in mm



<b>Housing</b>	Plastics
<b>Installation</b>	Flush-mounted Diameter Ø 80 mm
<b>Surface thickness</b>	10 – ∞ mm





Description	Picture	Specifications	Order Number
<b>EVoline Circle80</b>  Type 927-3 1 x VDE-socket, 16 A, with contact-protection 1 x Double USB Charger 2,1 A fixed power cable 3 m with protective contact angle plug.		black	1592 7300 0900
		white	1592 7300 1000
<b>EVoline Cover plate for Circle80</b>		Cover plate completely closed  black	9332 4560 0000
		white	9332 4570 0000
		Cover plate with 6 cable outlets (2 x 4, 7 and 9 mm)	
		black	9332 4540 0000
		white	9332 4550 0000
		Cover plate with multimedia applications (socket - socket, without cable) and 3 cable outlets (2 x 4 mm, 1 x 9 mm)	
		RJ45 Cat. 6 shielded	9331 8090 0000
		RJ45 Cat. 6A shielded	9331 8290 0000
		USB 3.0	9331 8530 0000
		HDMI 1.4	9331 8540 0000

# EVoline® Square80



EVoline Square80 fits into standard openings that are pre-made with a diameter of 80 mm. It provides a power socket, a USB charger, and a data connection.

In its Qi version EVoline Square80 offers an additional wireless charging surface integrated into the cover, for charging of Qi capable mobile phones.

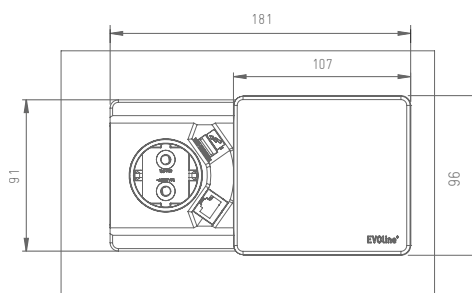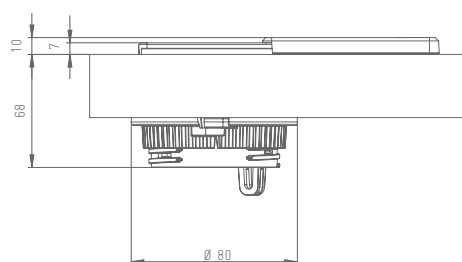

Dimensions in mm

<b>Housing</b>	Plastics
<b>Cover</b>	Plastics
<b>Installation</b>	Flush-mounted Diameter Ø 80 mm
<b>Surface thickness</b>	10 – 50 mm





#### Surface- / Colour-variations






Stainless steel finish






black



white

Description	Picture	Specifications	Order Number
<b>EVOLine Square80</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type A, 5 V / 1 A Fixed supply cable 3 m with angled plug.		<b>Cover and housing black</b>	1592 7000 0100
		CAT 6 Socket 3.0 m Cable and plug	
		3.0 m pull out CAT 6 patch cable	1592 7000 0200
		2x USB Charger	1592 7001 6300
		without data	1592 7000 0300
		<b>Cover and housing white</b>	
		CAT 6 Socket 3.0 m Cable and plug	1592 7000 1900
		3.0 m pull out CAT 6 patch cable	1592 7000 2000
		2x USB Charger	1592 7001 6400
		without data	1592 7000 2100
		<b>Cover in stainless steel optics housing in black</b>	
		CAT 6 Socket 3.0 m Cable and plug	1592 7000 3100
		3.0 m pull out CAT 6 patch cable	1592 7000 3200
		2x USB Charger	1592 7001 6500
		without data	1592 7000 3300

Description	Picture	Specifications	Order Number
<b>EVoline Square80 with Wireless Charger</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type A, 5 V / 1 A 1x Wireless Charger Fixed supply cable 3 m with angled plug.		<b>Cover and housing black</b>	
		3.0 m Cable and plug CAT 6 Socket	1592 7000 0400
		3.0 m pull out CAT 6 patch cable	1592 7000 0500
		without data	1592 7000 0600
		<b>Cover and housing white</b>	
		3.0 m Cable and plug CAT 6 Socket	1592 7000 2200
		3.0 m pull out CAT 6 patch cable	1592 7000 2300
		without data	1592 7000 2400
		<b>Cover in stainless steel optics housing in black</b>	
		3.0 m Cable and plug CAT 6 Socket	1592 7000 3400
		3.0 m pull out CAT 6 patch cable	1592 7000 3500
		without data	1592 7000 3600
		<b>Wireless charging</b> <ul style="list-style-type: none"> <li>■ inductive coupling between transmitter (charging station) and receiver (mobile phone)</li> <li>■ vendor independent, charges any Qi compatible device</li> <li>■ transmitter coil is active only when a connection to the receiving device is made</li> </ul>	



Enhanced protection for the home.

# EVoline® BackFlip




The EVoline BackFlip sits nearly flush on the work surface - when closed - the giving enhanced protection against liquid spillages. At a touch of a finger, it turns 180 degrees to reveal two power sockets and a USB charger.

The raised position provides further protection against spillages. With a total installation height of just 53 mm, the BackFlip can be fitted above most drawers, including a cutlery drawer.

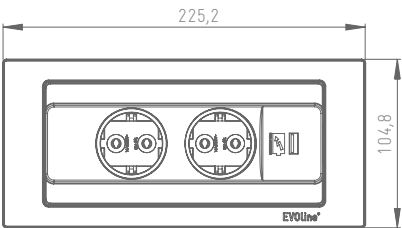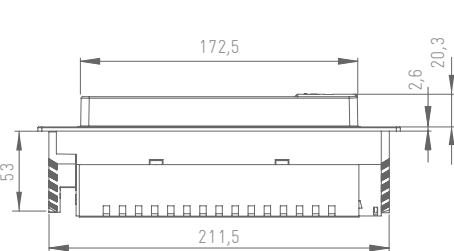

Dimensions in mm

Housing	Plastics
Cover inlay	Stainless steel, Lacquered steel, Glass
Installation	Flush-Mounted
Surface thickness	10 – 40 mm
Retractable	yes (rotation)

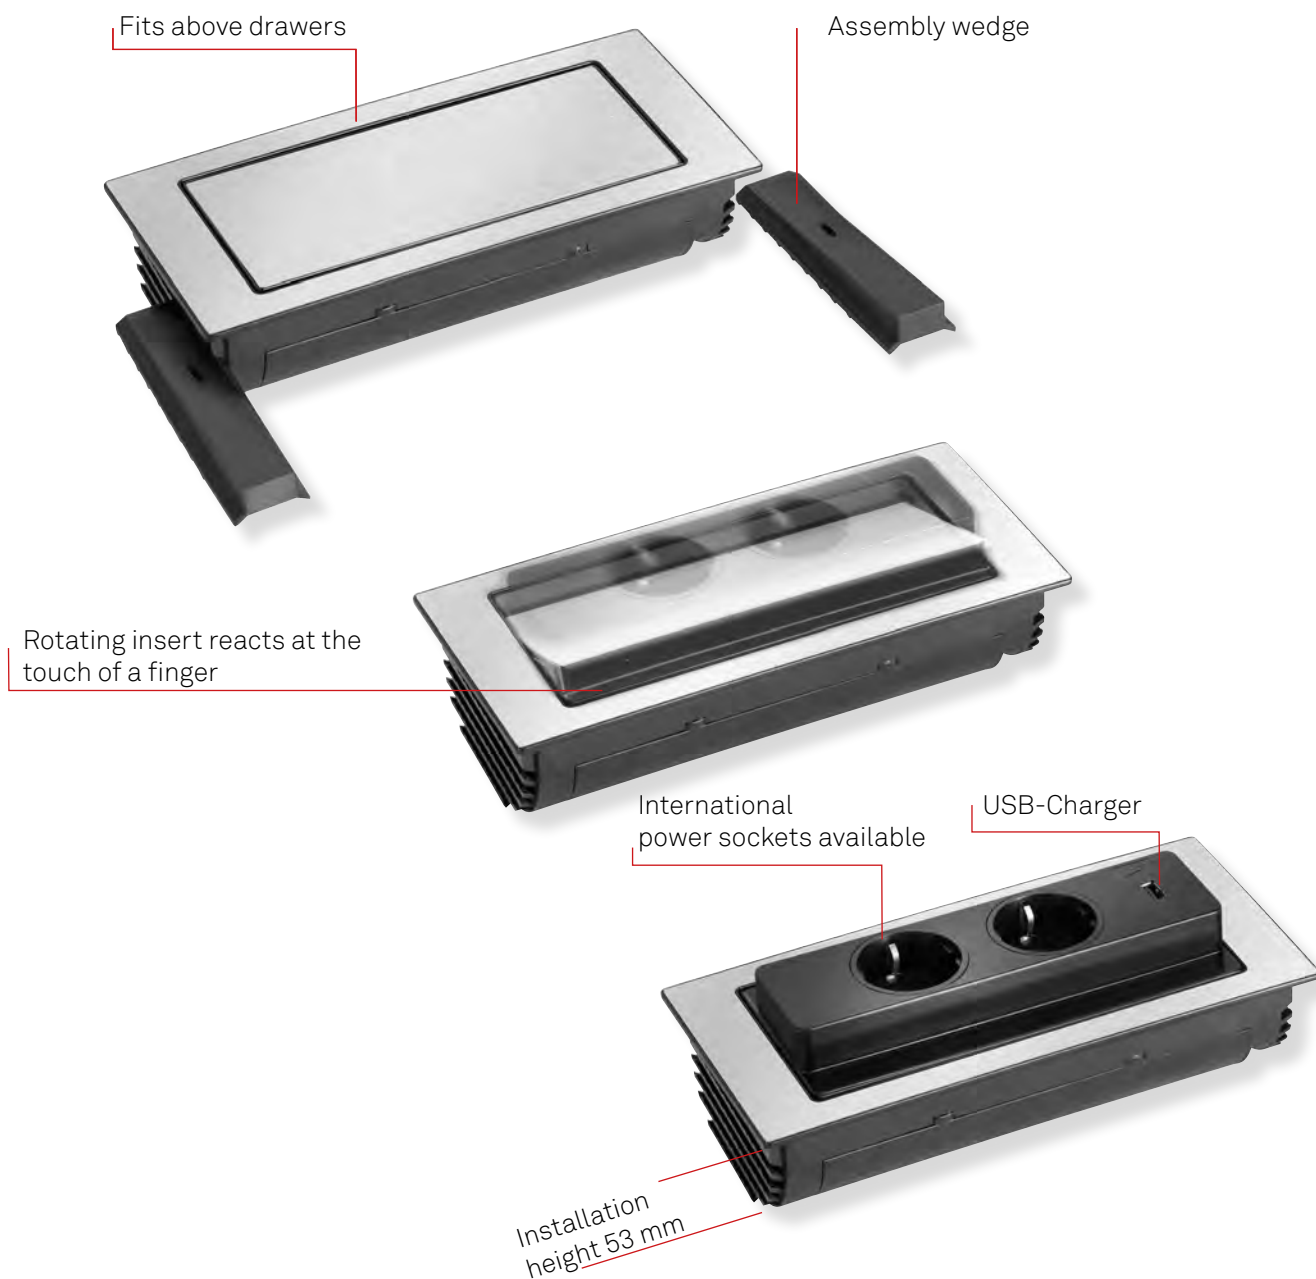

#### Surface- / Colour-variations




Brushed stainless steel



Steel matt black lacquered



Steel matt white lacquered

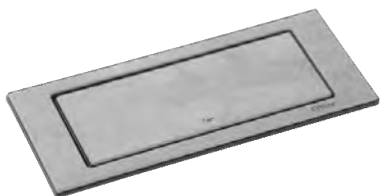

Ceramic concrete look






Glass glossy black



Glass frosted white



Description	Picture	Specifications	Order Number
<b>EVoline BackFlip</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A Fixed Power Supply Cable 3.0 m with angled plug.		Cover Brushed Stainless Steel	1592 7100 0200
		Cover Glass, frosted white	1592 7100 2000
		Cover Glass, glossy black	1592 7100 2100
		Cover matt white lacquered	1592 7100 5000
		Cover matt black lacquered	1592 7100 5100
		Cover Ceramic, concrete look*	1592 7101 3700
<b>EVoline BackFlip with EVoline PlugFix</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A Fixed Power Supply Cable 3.0 m with EVoline PlugFix.		Cover Brushed Stainless Steel	1592 7100 0900
		Cover Glass, frosted white	1592 7100 2200
		Cover Glass, glossy black	1592 7100 2300
		Cover Ceramic, concrete look*	1592 7101 3800
<b>EVoline BackFlip CUISINE</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, 5 V / 1 A, Fixed Power Supply Cable 2.5 m Plug supplied unattached		Cover Brushed Stainless Steel	1592 7100 0100
		Cover Glass, frosted white	1592 7100 1800
		Cover Glass, glossy black	1592 7100 1700
		Cover matt white lacquered	1592 7100 5200
		Cover matt black lacquered	1592 7100 5300
		Cover Ceramic, concrete look*	1592 7101 3200

\* expected to be available from March 2020


# EVoline® Port Push



The EVoline Port Push fits virtually flush with the work surface.

By using the Push-To-Open function, the housing is released and appears above the work surface, enabling an easy pull up to connect power and data cables. With a light press of a finger, it retracts with connected leads. Slide dampers ensure a soft closing. The patented rocking cover enables a space-saving cable routing through the desk.

The Port Push modules can be assembled to customer's needs. The interchangeable data and multimedia modules allow greater flexibility, enabling future proof technology with ever changing usage requirements.

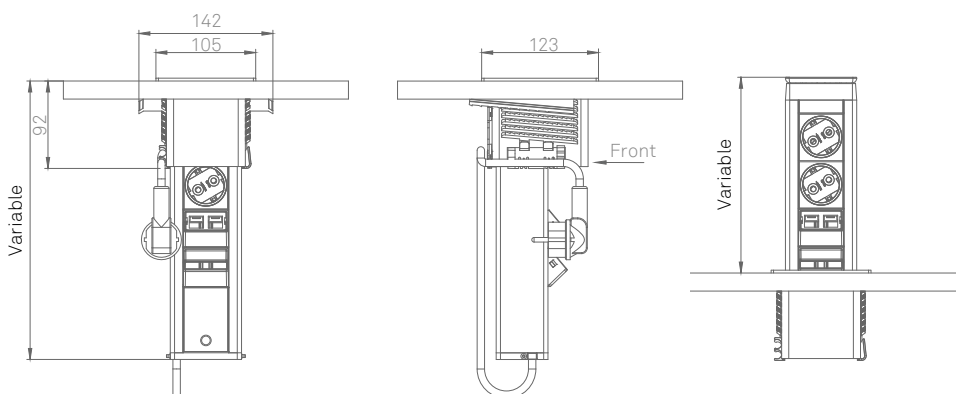

Dimensions in mm

<b>Housing</b>	Aluminium, anodised
<b>Inlay for Cover and Collar</b>	Stainless steel Glass
<b>Installation</b>	Flush-mounted
<b>Surface thickness</b>	10 – 50 mm
<b>Interchangeable modules</b>	25 mm
<b>Configurable</b>	yes
<b>Retractable</b>	yes (connected leads)

Push-Function facilitates the opening

Individual surfaces



Brushed Stainless Steel



Glass, black



Glass, white

International  
power socket modules





USB-Charger:  
Charges all common  
devices with  
USB connection

Bespoke assembly with  
interchangeable modules  
to meet your requirements



A selection of interchangeable modules  
can be found on page 101.



Description	Picture	Specifications	Order Number
<p><b>EVoline Port Push</b></p> <p>Aluminium housing silver anodized. 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0300
<p><b>EVoline Port Push</b></p> <p>Aluminium housing silver anodised. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0400

Surface- / Colour-variations

		
Brushed stainless steel	Black glass (gloss)	White glass (frosted)

Description	Picture	Specifications	Order Number
<p><b>EVOLine Port Push Cuisine</b></p> <p>Aluminium housing, silver anodised. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0100
<p><b>EVOLine Port Push Cuisine Charger</b></p> <p>Aluminium housing, silver anodised. 1 × USB-Charger Type A, 5 V / 1 A 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0200



Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**EVoline Port Push DATA**

Aluminium housing, silver anodised.  
 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected.  
 2 × modular couplings CAT 6 shielded, 1:1 interconnected.  
 Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0500

**EVoline Port Push CHARGER**

Aluminium housing, silver anodised.  
 2 × USBCharger Typ A, 5 V / 1 A  
 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected.  
 Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0600

## Configure your individual EVoline Port *Push* using the EVoline Modular System

See page 4-5 for instructions

**Configurable Basic Housing  
EVoline Port Push**

Aluminium housing, silver anodised.



Cover and collar in black plastic with brushed stainless steel inlay

9332 0040 0000

Cover and collar in black plastic with frosted white glass inlay

9332 1020 0000

Cover and collar in black plastic with glossy black glass inlay.


9332 1030 0000

# EVoline® Port



EVoline Port let sockets and cables simply disappear. Just the collar and cover of the Port are visible on the work surface.

The easy pull-up motion let the high-quality aluminium body appear and subsequently a push-down motion let it disappear below the surface even with attached plugs. The patented rocking cover creates enough space for a cable outlet.

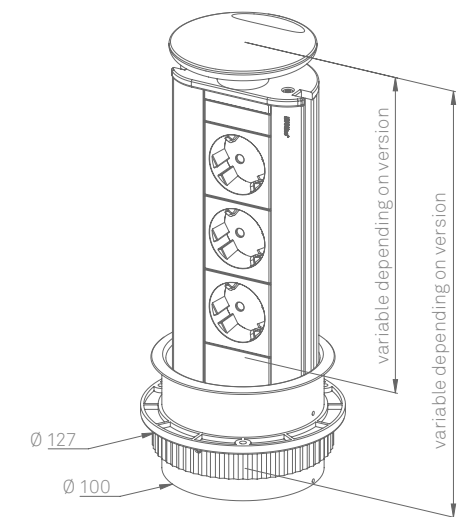

Dimensions in mm

Housing	Aluminium, anodised
Rocking Cover	Stainless steel Lacquered plastics
Collar	Lacquered plastics
Installation	Flush-mounted Diameter Ø 102 mm
Surface thickness	10 – 50 mm
Configurable	yes
Retractable	yes (connected leads)

Patented rocking cover

Individual surfaces



Silver  
lacquered plastics



Stainless steel  
in CD-Optics



White  
lacquered plastics



Black  
lacquered plastics



Chrome-plated  
steel



Antique brass  
lacquered plastics

NIGHTLIGHT effect



International  
power socket modules





Large selection  
of modules



Quick Fastener



Description	Picture	Specifications	Order Number
<b>EVOLine Port</b>  Aluminium housing, silver anodised.  2× sockets, VDE-compliant, 60°, 16 A contact-protected Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1000 3300
		Rocking cover and collar made of black lacquered plastic	1593 1000 5200
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1003 1100
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect	1593 1003 1200
<b>EVOLine Port</b>  Aluminium housing, silver anodised.  3× sockets, VDE-compliant 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1000 0100
		Rocking cover and collar made of black lacquered plastic	1593 1000 5000
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1002 1600
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect	1593 1003 1300

Description	Picture	Specifications	Order Number
<b>EVoline Port Cuisine</b>  Aluminium housing, silver anodised.  3× sockets, VDE-compliant, 60°, 16 A contact-protected Fixed supply cable 2.5 m with wire end ferrules Plug supplied unattached.		Rocking cover made of silver lacquered plastic, Collar made of grey plastic	1593 1000 0600
<b>EVoline Port DATA</b>  Aluminium housing, silver anodised.  2× sockets, VDE-compliant, 60°, 16 A contact-protected Fixed supply cable 3.0 m with angled plug. 2× modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.		Rocking cover and collar made of silver lacquered plastic  Rocking cover and collar made of black lacquered plastic  Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics  Rocking cover made of solid stainless steel in CD design, collar made of pla- stic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect	1593 1003 1400  1593 1003 1500  1593 1003 1600  1593 1003 1700



Description	Picture	Specifications	Order Number
<b>EVoline Port DATA</b>  Aluminium housing, silver anodised.  3× sockets, VDE-compliant, 60°, 16 A contact-protected. 2× Cat. 6 modular couplings Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1003 1800
		Rocking cover and collar made of black lacquered plastic	1593 1003 1900
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1003 2000
		Rocking cover made of solid stainless steel in CD design, collar made of pla- stic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect	1593 1003 2100
<b>EVoline Port USB-CHARGER</b>  Aluminium housing, silver anodised.  2x sockets, VDE-compliant, 60°, 16 A, contact-protected. 1x USB Type A Charger, 5V / 1 A Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1040 0200
		Rocking cover and collar made of black lacquered plastic	1593 1040 0300
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1040 0400
<b>EVoline Port 2x USB-CHARGER</b>  Aluminium housing, silver anodised.  3x sockets, VDE-compliant, 60°, 16 A, contact-protected 2× USB-Charger Type A, 5 V / 1 A Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1038 4100
		Rocking cover and collar made of black lacquered plastic	1593 1038 7100
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1038 7200

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## Configure your individual EVoline Port using the EVoline Modular System

See page 4-5 for instructions

### Configurable Basic Housing EVoline Port

Aluminium housing  
silver anodised.

Mounting hole ø 102 mm.



Rocking cover and collar  
made of silver lacquered  
plastic

9330 1830 0000

Rocking cover made of  
solid stainless steel in CD  
design, collar made of pla-  
stic, lacquered in stainless  
steel optics

9330 1360 0000

### Configurable Basic Housing EVoline Port CLASSIC

Aluminium housing  
plated in antique brass colour.

Mounting hole ø 102 mm



Rocking cover and collar  
made of antique brass  
lacquered plastic

9330 2710 0000

### Configurable Basic Housing EVoline Port CHROME

Chrome plated aluminium housing

Mounting hole ø 102 mm.



Rocking cover made of  
chromed steel,  
collar made of black  
lacquered plastic

9330 2750 0000

### Configurable Basic Housing EVoline Port BLACK

Aluminium housing  
black anodised.

Mounting hole ø 102 mm.



Rocking cover and collar  
made of black lacquered  
plastic

9330 5560 0000

### Nightlight LED Modul for EVoline Port

LEDs underneath rocking cover



Light colour: night blue

9330 3830 0000

Light colour: ruby red

9330 3840 0000

Light colour: emerald green

9330 5790 0000

Light colour: soft white

9331 0260 0000


A touch of a finger is sufficient.

# EVoline® FlipTop Push




The FlipTop Push is an elegant solution supplying all work areas with power, data and multimedia.

Interchangeable modules for data and multimedia ensure unlimited flexibility for future requirements at the workspace.

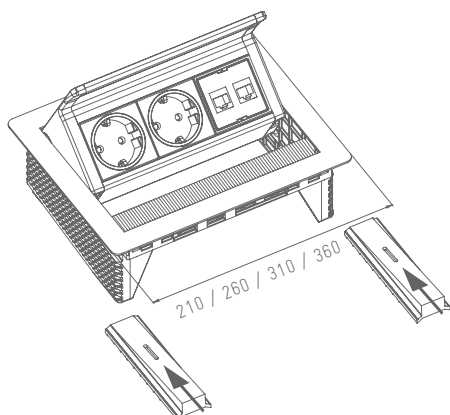

Dimensions in mm

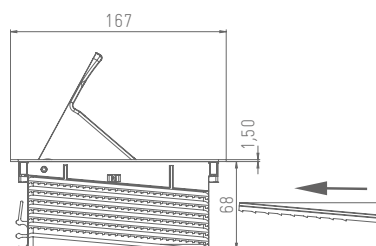

<b>Housing</b>	Aluminium, anodised or powder-coated
<b>Cover</b>	Stainless steel brushed, powder-coated
<b>Installation</b>	Flush-Mounted (Height 68 mm)
<b>Surface thickness</b>	10 – 50 mm
<b>Configurable</b>	yes

Simple and quick exchange of modules. Customisable with interchangeable modules.



Push-to-open function  
Final open position with manual  
locking mechanism allows  
easy insertion of plugs.




International power  
socket modules



Quick installation,  
for surface thickness  
up to 50 mm



Adaptor clip  
for safe connection to  
WireLane



Convenient cable routing  
ensures tidiness below  
the table

Surface- / Colour-variations



Brushed stainless steel








Steel black powder coated



Steel gray powder coated



Steel white powder coated

Description	Picture	Specifications	Order Number
<b>EVoline FlipTop Push S</b>  3× sockets, VDE-compliant 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm		Housing made of black anodised aluminium Cover brushed stainless steel	1593 7002 4900
<b>EVoline FlipTop Push Data S</b>  2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm		Housing made of black anodised aluminium Cover brushed stainless steel	1593 7002 8100
<b>EVoline FlipTop Push M</b>  4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm		Housing made of black anodised aluminium Cover brushed stainless steel	1593 7000 2700
<b>EVoline FlipTop Push M</b>  2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× installation space for interchangeable modules Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm		Housing made of black anodised aluminium Cover brushed stainless steel	1593 7010 1400
<b>EVoline FlipTop Push Data M</b>  3× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm		Housing made of black anodised aluminium Cover brushed stainless steel	1593 7000 0200



Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## Configure your individual EVoline FlipTop *Push* using the EVoline Modular System

See page 4-5 for instructions

### Configurable Basic Housing EVoline FlipTop Push S

For 3 modules  
Housing made of black anodised aluminium,  
Installation dimensions: 157 × 195 mm



Cover	
brushed stainless steel	9331 8010 0000
black powder-coated	9331 9360 0000
white powder-coated	9331 9630 0000
grey powder-coated	9331 9670 0000

### Configurable Basic Housing EVoline FlipTop Push M

For 4 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 245 mm



Cover	
brushed stainless steel	9331 8020 0000
black powder-coated	9331 9370 0000
white powder-coated	9331 9640 0000
grey powder-coated	9331 9680 0000

### Configurable Basic Housing EVoline FlipTop Push L

For 5 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 295 mm



Cover	
brushed stainless steel	9331 8030 0000
black powder-coated	9331 9380 0000
white powder-coated	9331 9650 0000
grey powder-coated	9331 9690 0000

### Configurable Basic Housing EVoline FlipTop Push XL

For 6 Modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 345 mm





Cover	
brushed stainless steel	9331 8040 0000
black powder-coated	9331 9390 0000
white powder-coated	9331 9660 0000
grey powder-coated	9331 9700 0000

### Configurable Basic Housing EVoline FlipTop Push white

For 3-6 Modules  
Housing made of white powder-coated aluminium,  
cover white powder-coated,  
Incl. WireLane Adaptor



S	9332 3980 0000
M	9332 3990 0000
L	9332 4000 0000
XL	9332 4010 0000

Description	Picture	Specifications	Order Number
<b>EVoline WireLane Adaptor</b>  To connect WireLane to FlipTop Push.			1599 0910 3300
<b>EVoline FlipTop Push TRAY</b>  black powder-coated. For protection and cover below the table. Also applicable as cable tray.		for FlipTop Push S  for FlipTop Push M  for FlipTop Push L  for FlipTop Push XL	1599 0910 8600  1599 0910 8700  1599 0910 8800  1599 0910 8900


A flexible modular system for various applications.

# EVoline® FrameDock



EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:



High quality design, customisable components and yet discreet.

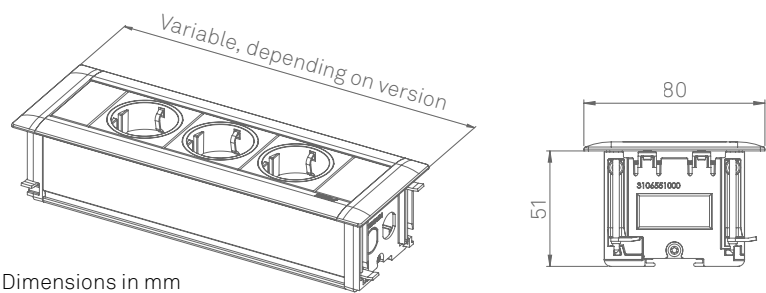

Dimensions in mm



Profile	Aluminium, anodised or powder-coated
Screw Cover	Plastics
Installations	Flush-Mounted (51 mm)
Surface thickness	5 – 38 mm
Configurable	yes

Examples of power supply options:


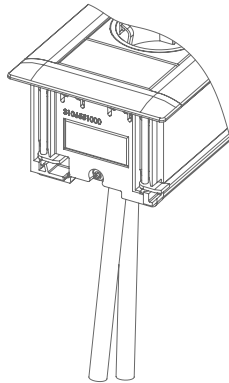
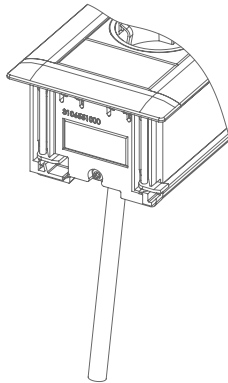


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA connector



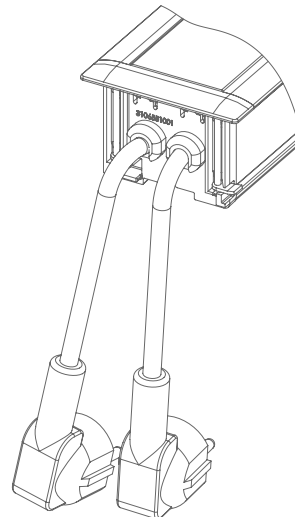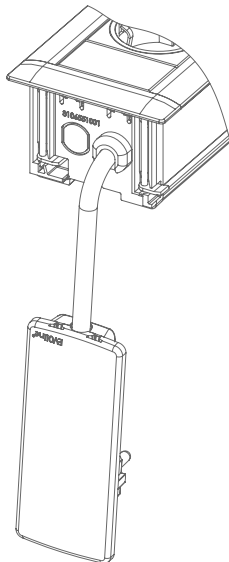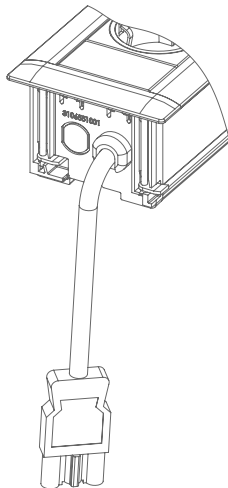

End cap with power input or output connector, depending on the surface thickness (max. 18 mm)



End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)

Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18- or WAGO WINSTA connector.

Description	Picture	Specifications	Order Number
<b>EVoline FrameDock SMALL</b>  Aluminium housing, silver anodised, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Powersupply cable entry left side in the bottom of the profile.  Installation Dimensions: 71 mm × 225 mm		Profile silver anodised Screw covers black plastic	1596 1000 0900
		Profile black Screw covers black plastic	1596 1001 9500
		Profile white Screw covers white plastic	1596 1001 7900
<b>EVoline FrameDock DATA SMALL'</b>  Aluminium housing, silver anodised 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power and data cable entry in the bottom of the profile.  Installation Dimensions: 71 mm × 280 mm		Profile silver anodised Screw covers black plastic	1596 1000 1000
		Profile black Screw covers black plastic	1596 1001 9600
		Profile white Screw covers white plastic	1596 1001 8000

## Configure your individual EVoline FrameDock using the EVoline Modular System

See page 4-5 for instructions

### Configurable Basic Housing FrameDock

For surface thickness up to 38 mm



Profile silver anodised Screw covers black plastic	9331 2180 0000
Profile Silver anodised Screw covers silver lac- quered plastic	9331 2550 0000
Profile black anodised Screw covers black plastic	9331 5330 0000
Profile white powder- coated Screw covers white plastic	9331 3540 0000



# EVoline® Dock Square



EVoline Dock Square, the modern generation of on-Desk systems, provides a mobile, compact and flexible solution for the workspace.

Starting with the Dock Square Basic up to the individually configurable versions, interchangeable modules for Data and Multimedia facilitate timeless and almost unlimited flexibility as connectivity requirements evolve.

An easy adhesive fixing simplifies the installation. The adhesive connection is removable at any time enabling the Dock Square to be placed in another position. Even on Glass!

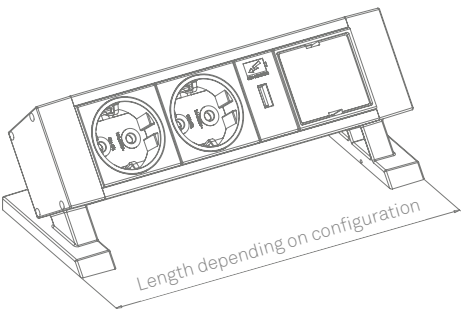

Housing	Aluminium, anodised or powder-coated
Installation	On-Desk Mounted Free arrangeable
Interchangeable modules	50 mm
Configurable	yes



Simple and quick exchange of modules. Customisable with interchangeable modules.



A selection of interchangeable modules can be found on page 101.




International socket modules



Cable connections are easily accessible.







Simple cable-routing.



Fast fixing and removal with double sided strips

# EVoline® Dock Square

Description	Picture	Specifications	Order Number
<p><b>EVoline Dock Square</b></p> <p>Aluminium housing. 2 × VDE Sockets 0°, 16 A 1 × USB-Charger Type A, 5V / 1A 1 × Installation Space 2× Double sided strips. Fixed supply cable 3.0 m with GST18 plug Dimensions (W × H × D): 220 × 85 × 89 mm</p>		<p><b>Housing</b> silver anodised</p>	1593 8000 0100
<p><b>EVoline Dock Square suitable for FUJITSU Port Replicator PR09</b></p> <p>Aluminium housing. 1× VDE Socket 0°, 16 A 1× VDE Socket 60°, 16 A 1 × cable outlet 1 × on / off switch 2 × Double sided strips for table mounting. Fixed mains cable 3 m with VDE angle plug Output cable 0.5 m with GST 18 socket</p> <p>Dimensions (W × H × D): 244 × 97,5 × 115 mm</p>		<p><b>Housing</b> silver anodised</p>	1593 8100 0400
<p><b>Configurable Basic Housing EVoline Dock Square</b></p> <p>Aluminium housing. 2× Double sided strips.</p>		<p><b>Housing</b> silver anodised  black anodised  white powder coated</p>	9332 0720 0000  9332 0730 0000  9332 1170 0000
<p><b>Double Sided Strips for EVoline Dock Square</b></p> <p>2× Double sided strips</p>			9332 1050 0000


Above desk quality for home, office, hotel.

# EVoline® Dock



EVoline Dock sits above the desk allowing maximum workspace. Various fixing options are available like EVoline Quicklock, clamps, pillars, etc.


The configurable charging and data station can be equipped with the complete EVoline Modules range.

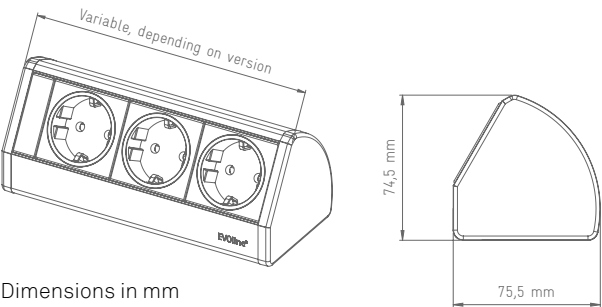

Dimensions in mm

Profile	Aluminium, anodised or powder-coated
End Caps	Plastics
Installation	On-Desk-Mounted (Mounting-set, Mounting-clamps)
Configurable	yes


## Examples of power supply options:

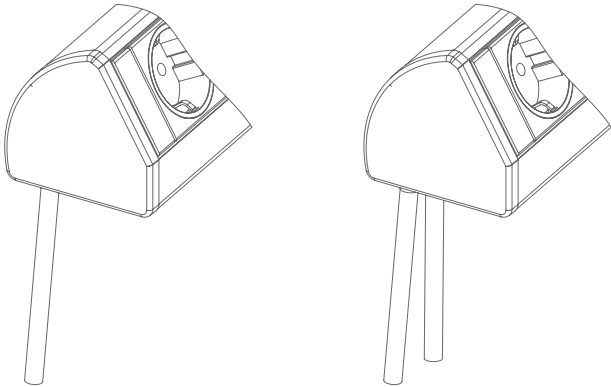

Fixed Power Supply Cable through the bottom of the profile


Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

Color of the end caps painted to match the profiles color.

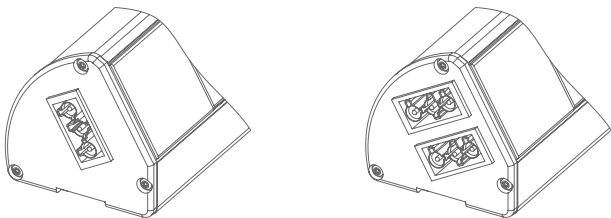

End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)

End cap colour: black

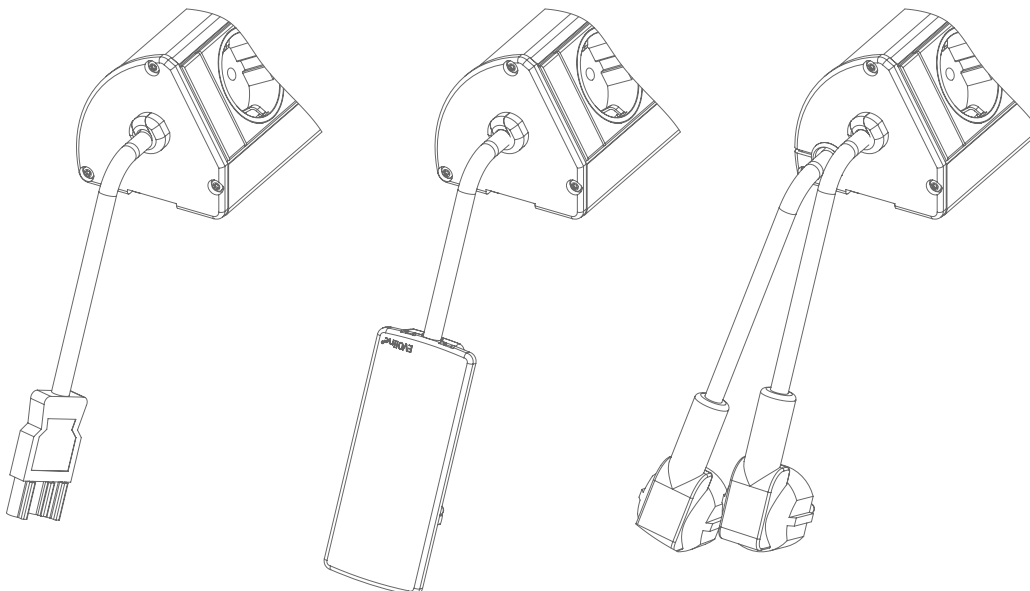

End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18 or WAGO WINSTA Connector.

Color of the end caps: black

Description	Picture	Specifications	Order Number
<b>EVOLine Dock CUISINE</b>  Aluminum housing, anodised in colour stainless steel (ALANOX®) End caps lacquered to match the frame color, supplied unattached. Outlet receptacles painted to match the color profile. 3× VDE sockets with 2.5 m supply cable with wire end ferrules. VDE plug supplied unattached. Mounting set for under desk installation attached.		Stainless steel anodised (ALANOX®)	1593 0368 3600
<b>EVOLine Dock DESK</b>  Aluminium housing, free positioning with provided slide stops. 3x sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry in the left end cap.		Silver anodised  Black anodised  White powder-coated	1593 0004 0300  1593 0004 0100  1593 0004 0700
<b>EVOLine Dock DESK DATA</b>  Aluminium housing, free positioning with provided slide stops. 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power supply cable entry in the left end cap.		Silver anodised  Black anodised  White powder-coated	1593 0047 8300  1593 0047 8100  1593 0047 8700

Description	Picture	Specifications	Order Number
<b>EVOLine Dock SMALL</b>  Aluminium housing. 3× sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry left side in the bottom of the profile.		<b>With 2 mounting clamps for surfaces thickness 8 - 40mm</b>	
		Silver anodised	1593 0066 6300
		Black anodised	1593 0066 6100
		White powder-coated	1593 0066 6700
		<b>Without mounting clamps</b>	
		Silver anodised	1593 0003 9300
	  	<b>With 2 mounting clamps for surfaces thickness 8 - 40mm</b>	
		Silver anodised	1593 0066 2300
		Black anodised	1593 0066 2100
		White powder-coated	1593 0066 2700
<b>EVOLine Dock DATA SMALL</b>  Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× modular couplings RJ45 to RJ45 Cat.6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.		<b>With QuickLock Pro 150 mm for surfaces thickness 18 - 32mm</b>	
		Silver anodised	1593 0394 4300
		Black anodised	1593 0394 4100
		White powder-coated	1593 0394 4700
		<b>Without mounting clamps</b>	
		Silver anodised	1593 0047 7300
		Black anodised	1593 0047 7100
		White powder-coated	1593 0047 7700



Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## Configure your individual EVOLine Dock using the EVOLine Modular System

See page 4-5 for instructions

### **Configurable Basic Housing EVOLine Dock BLACK**

Aluminium housing  
Cable entry through end cap or  
profile.



Black anodised

9330 1811 0000

### **Configurable Basic Housing EVOLine Dock SILVER**

Aluminium housing  
Cable entry through end cap or  
profile.



Silver anodised

9330 1810 0000

### **Configurable Basic Housing EVOLine Dock STAINLESS**

Aluminium housing  
Cable entry through end cap or  
profile.



Stainless steel alike  
anodised (ALANOX®)

9330 8450 0000

### **Configurable Basic Housing EVOLine Dock WHITE**

Aluminium housing  
Cable entry through end cap or  
profile.



White powder-coated  
End caps plastic laquered  
to match  
(in case cable entry  
through the profile)


9331 3530 0000

Contemporary and modern for all workspaces.

# EVoline® R-Dock




EVoline R-Dock can be installed into any right-angled corner.  
With its flat back and angled front fascia, it is comfortable to use. Freely configurable.

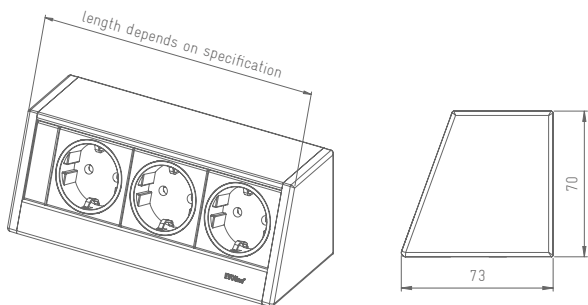

Dimensions in mm


Profile	Aluminium, anodised or powder-coated
End Caps	Plastics
Installation	On-Desk-Mounted (Mounting-set, Mounting-clamps)
Configurable	yes

Examples of power supply options:

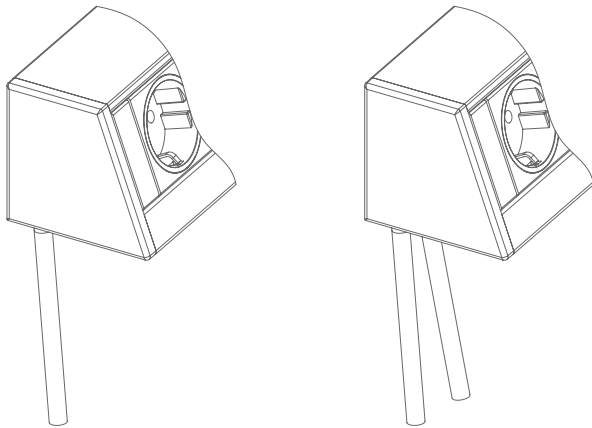


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST18i3, or WAGO WINSTA Connector

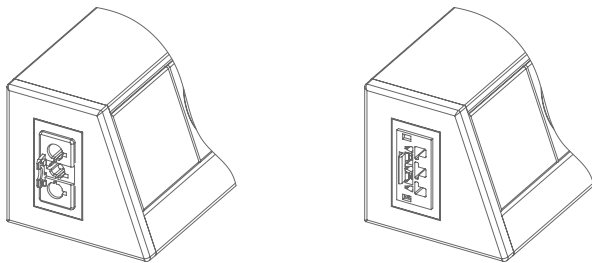

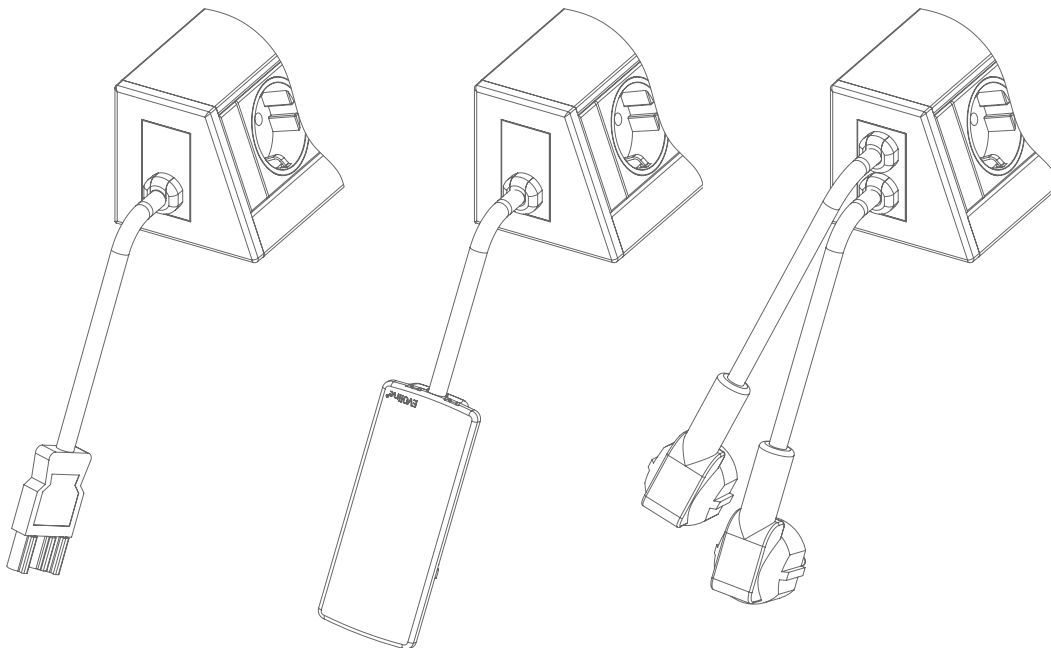

End cap with Wieland GST18i3, or WAGO WINSTA power input or output connector.





End cap with fixed power supply cable

Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST18i3- or WAGO WINSTA Connector.

Description	Picture	Specifications	Order Number
<b>EVOLine R-Dock SMALL</b>  Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry on the left side in the bottom of the profile.		Silver anodised  White powder-coated	1598 0000 1700  1598 0000 8600
<b>EVOLine R-Dock DATA SMALL</b>  Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× Cat.6 modular couplings Power and data cable entry in the bottom of the profile.		Silver anodised  White powder-coated	1598 0000 1800  1598 0000 8700

Configure your individual EVOLine R-Dock using the EVOLine Modular System

See page 4-5 for instructions

<b>Configurable Basic Housing EVOLine R-Dock</b>  Aluminium housing. Power supply cable entry through end cap or profile.		Silver anodised	9331 0620 0000
<b>Configurable Basic Housing EVOLine R-Dock</b>  Aluminium housing. Power supply cable entry through end cap or profile.		White powder-coated	9331 4340 0000


At home in the kitchen.

# EVoline® T-Dock




The EVoline T-Dock is raised above the work surface by its solid stainless steel pillar. This gives clutter free space and creates a safe distance between power supply and potentially wet surfaces in the kitchen.

The power supply cable is routed through the stained steel pillar which is also a high quality anti-theft device since it is firmly screwed beneath the surface.

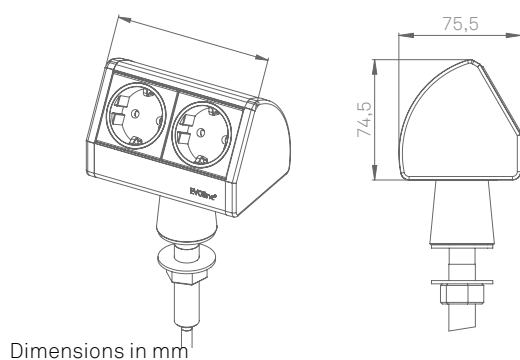


Profile	Aluminium, anodised or powder-coated
End Caps	Plastics
Installation	Mounted with Steel Pillar
Surface thickness	max. 40 mm

Examples for power supply of the T-Docks:

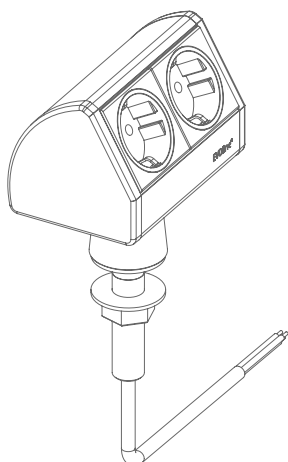

Fixed Power Supply Cable  
routed through the stain-  
less steel pillar.

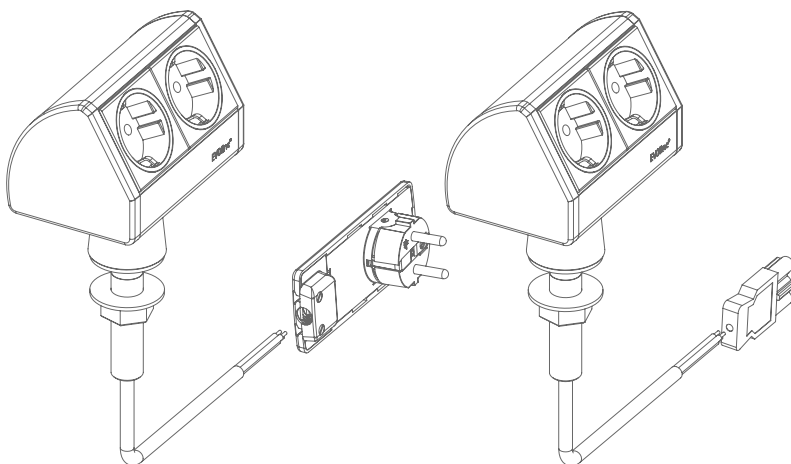



Fixed Power Supply Cable  
routed through the stain-  
less steel pillar.

Available with several  
country specific plugs,  
EVoline Plug, wire end  
ferrules,  
Wieland GST 18i3- or  
WAGO WINSTA Connector.

Further connectors on request.





Description	Picture	Specifications	Order Number
<b>EVoline T-Dock</b>  Aluminium housing in stainless steel optics, ALANOX®. For surface thickness up to 50 mm. 2× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable with ferrules, plug supplied unattached. Power supply cable entry through the stainless steel pillar.		Housing stainless steel alike anodised (ALANOX®) Plastic end caps lacquered in black	1593 0220 5600
		Housing stainless steel alike anodised (ALANOX®) Plastic end caps lacquered in stainless steel optics, ALANOX®	1593 0345 5600
<b>EVoline T-Dock with USB Charger</b>  1× socket, VDE-compliant, 0°, 16 A, contact-protected. 1x USB-Charger Type A, 5 V / 1 A Fixed supply cable with ferrules, plug supplied unattached. Power supply cable entry through the stainless steel pillar.		Housing stainless steel alike anodised (ALANOX®) Plastic end caps lacquered in black	1593 0387 4600
		Housing stainless steel alike anodised (ALANOX®) Plastic end caps lacquered in stainless steel optics, ALANOX®	1593 0387 5600

# EVoline® V-Dock




The EVoline V-Dock gives dead corners a benefit. It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.

Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.



Profile	Aluminium, anodised
End Caps	Plastics
Installation	Angle-Mounted (Angled profiles)
Configurable	yes

Examples of power supply options:



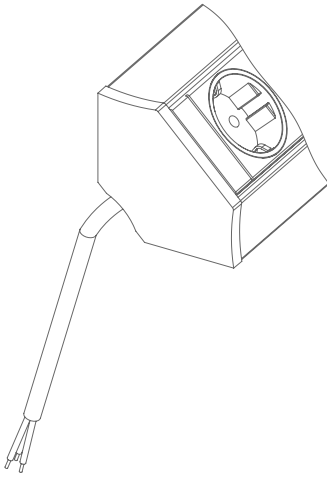


End cap with power input and/or output connector.

End cap with fixed power supply cable.

Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

End cap colour: black

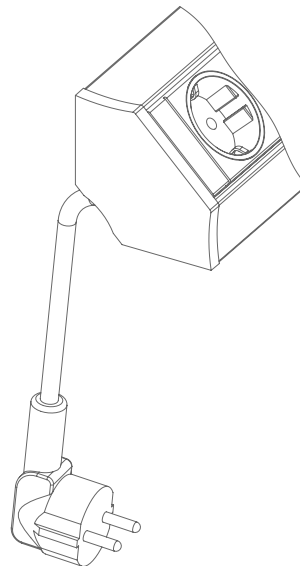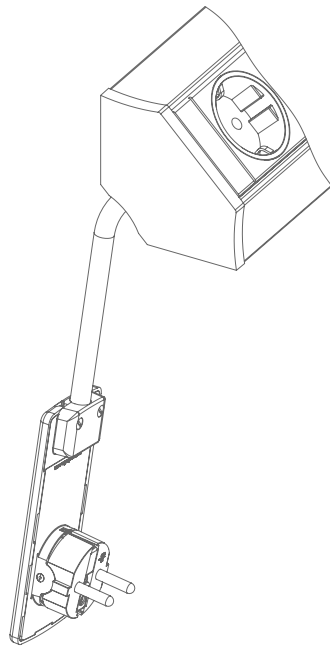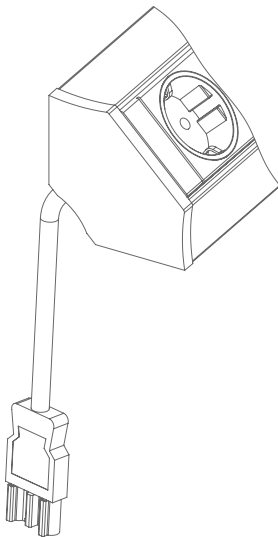

All above mentioned U-Dock end caps are available with or without mounting angles.

Description	Picture	Specifications	Order Number
<p><b>EVoline V-Dock CUISINE</b></p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 2.5 m with fer- rules, plug supplied unattached. Incl. profile bracket 100 mm.</p>		Silver anodised	1593 6000 1300
<p><b>EVoline V-Dock DATA SMALL</b></p> <p>Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. 2× modular couplings RJ45 to RJ45 Cat.6 shielded, 1:1 interconnected. Fixed supply cable 3 m with angled plug. Incl. 2 profile brackets 100 mm.</p>		Silver anodised	1593 6000 2300

Configure your individual EVoline V-Dock using the EVoline Modular System

See page 4-5 for instructions

**Configurable Basic Housing  
EVoline V-Dock**

Aluminium housing  
From a length of 250 mm,  
2 profile brackets of 100 mm are  
required for fixing.



Silver anodised 9330 5600 0000

**Configurable Basic Housing  
EVoline V-Dock**

Aluminium housing  
From a length of 250 mm,  
2 profile brackets of 100 mm are  
required for fixing.



Black anodised 9331 5850 0000

Connectivity for corners everywhere.

# EVoline® V-Port



reddot design award  
winner 2015



DESIGN  
AWARD  
2015




GERMAN  
DESIGN  
AWARD  
SPECIAL  
2016



In kitchens, you often find unused space underneath a wall cabinet, in corners and next to tall cupboards. This is where the EVoline V-Port can be installed.

In its closed position, the V-Port is concealed behind a discreet and elegant aluminium cover in stainless steel optics. A gentle touch releases a multiple socket rail. As option available with USB charger.

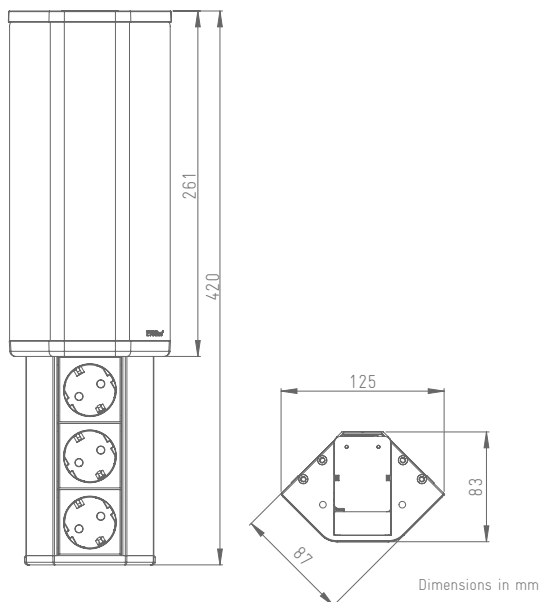


Housing	Aluminium
Cover	Aluminium
Installation	Angle - Mounted Flush-Mounted
Retractable	yes

Quick mounting,  
Easy connection  
via special connector



EVoline VDE  
Plug is stan-  
dard




Soft Touch  
release



International  
power socket  
versions  
available

USB-Charger  
optional




Description	Picture	Specifications	Order Number
<p><b>EVoline V-Port 2-gang</b></p> <p>2× VDE-compliant sockets, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0200</p>
<p><b>EVoline V-Port 3-gang</b></p> <p>3× VDE-compliant sockets, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plugin connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0100</p>
<p><b>EVoline V-Port 2-gang with USB-Charger</b></p> <p>2× VDE-compliant sockets, 60°, 16 A, contact-protected 1x USB Type A Charger, 5 V / 1 A Supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0300</p>

# EVoline® U-Dock



EVoline U-Dock can be mounted to any work surface in various ways.



As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.

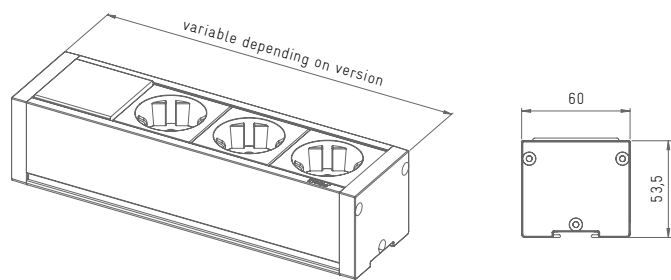




Dimensions in mm

Profile	Aluminium, anodised
End Caps	Plastics
Installation	On-Desk-Mounted (Mounting-angles)
Configurable	yes

Examples of power supply options:





End cap with  
Wieland GST 18i3, or  
WAGO WINSTA power input  
or output connector.

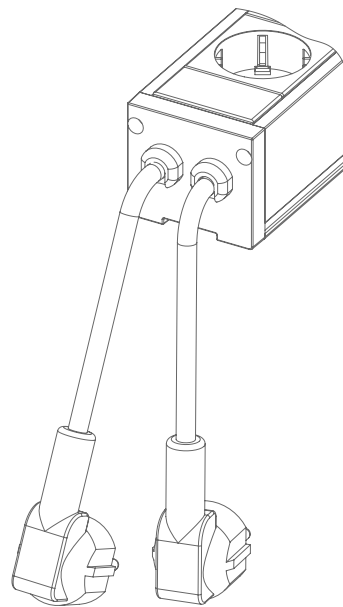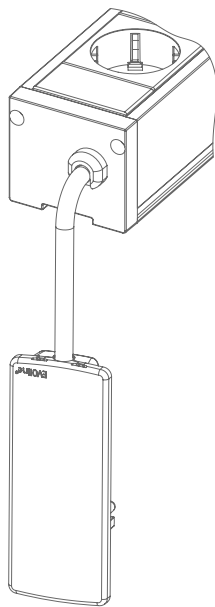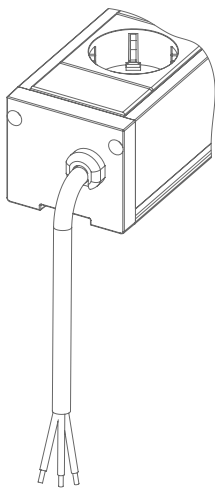

End cap with fixed power  
supply cable.

Available with several  
country specific plugs,  
EVoline Plug, wire end  
ferrules,  
Wieland GST 18i3- or  
WAGO WINSTA Connector.

End cap colour: black



All above mentioned  
U-Dock end caps are  
available with or without  
mounting angles.

Description	Picture	Specifications	Order Number
<b>EVOLine U-Dock SMALL</b>  Aluminium housing, 3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input and output connector GST18i3 plug and GST18i3 socket.		Silver anodised with mounting angles	1596 0000 9500
		Silver anodised without mounting angles	1596 0000 9600
<b>EVOLine U-Dock DATA SMALL</b>  Aluminium housing, 3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input and output connector GST18i3 plug and GST18i3 socket. 2× modular couplings RJ45 to RJ45 Cat.6 shielded, 1:1 interconnected. Entry for data cables in the opposite end cap.		Silver anodised with mounting angles	1596 0000 5900
		Silver anodised without mounting angles	1596 0000 3300

Configure your individual EVOLine U-Dock using the EVOLine Modular System

See page 4-5 for instructions


<b>Configurable Basic Housing EVOLine U-Dock</b>  Aluminium housing		Silver anodised End caps optionally with or without mounting angles	9330 8510 0000
---	---	---	----------------

# EVoline® Up



Thanks to its slim shape, the EVoline Up fits on any work surface, no matter how small, making access to electricity very convenient.

It organises the most important connections at the workplace and bundles them within easy reach on the desk. The surface is available as standard in black, white or brushed stainless steel. The vertical multiple socket can either be firmly screwed to the surface or quickly and securely attached to any work surface - even glass - using adhesive strips and removed without leaving any residue if required. This allows the electrification system to be used in the case of a Conversion can be easily reinstalled at a new location.

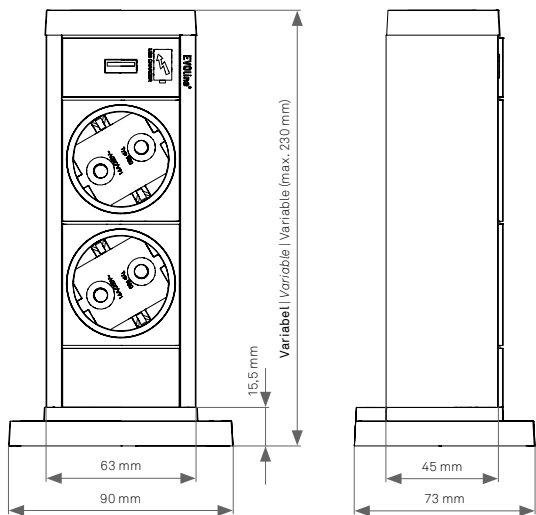

Housing	Aluminium, anodised or powder-coated
Stand	Plastic
Installation type	- On-Desk - Freestanding

Internationally approved  
socket modules

Double USB Charger



Stand can be bolted  
on request

Surface- / Colour-variations




silver/black

black/black

white/black

white/white



Description	Picture	Specifications	Order Number
<b>EVoline Up</b>  Aluminium housing silver anodized 2 × VDE Sockets 0°, 16 A 1 × USB-Charger Type A, 5 V / 1 A 2x Adhesive tapes Fixed supply cable 3.0 m Angled plug Dimensions (W × H × D): 90 × 75 × 180 mm		<b>Housing</b>  silver anodised  black anodised  white powder coated	1593 9000 0900  1593 9000 2700  1593 9000 2900

## Configure your individual EVoline Up using the EVoline Modular System

See page 4-5 for instructions

### Configurable Basic Housing EVoline Up

Aluminium housing  
2x Adhesive tapes

Note: Max. configuration: 3 ½ modules



#### Housing

Silver anodised	9332 2690 0000
black anodised	9332 2680 0000
white powder coated	9332 2700 0000

Stable. Free standing.


# EVoline® Vertical




EVoline Vertical is a free standing solution for any room. Securely fixed to a solid cast iron base, the Vertical is upright, mobile, space saving and is the ideal solution for offices, hotels or retail areas.

The maximum height of 1.20 m makes it unnecessary to bend over to reach sockets: Power, data and multimedia modules are available at a convenient height. It can be positioned right aside a floor outlet.

Profile	Aluminium, anodised
Base	Solid cast iron
Installation	Free standing
Configurable	yes

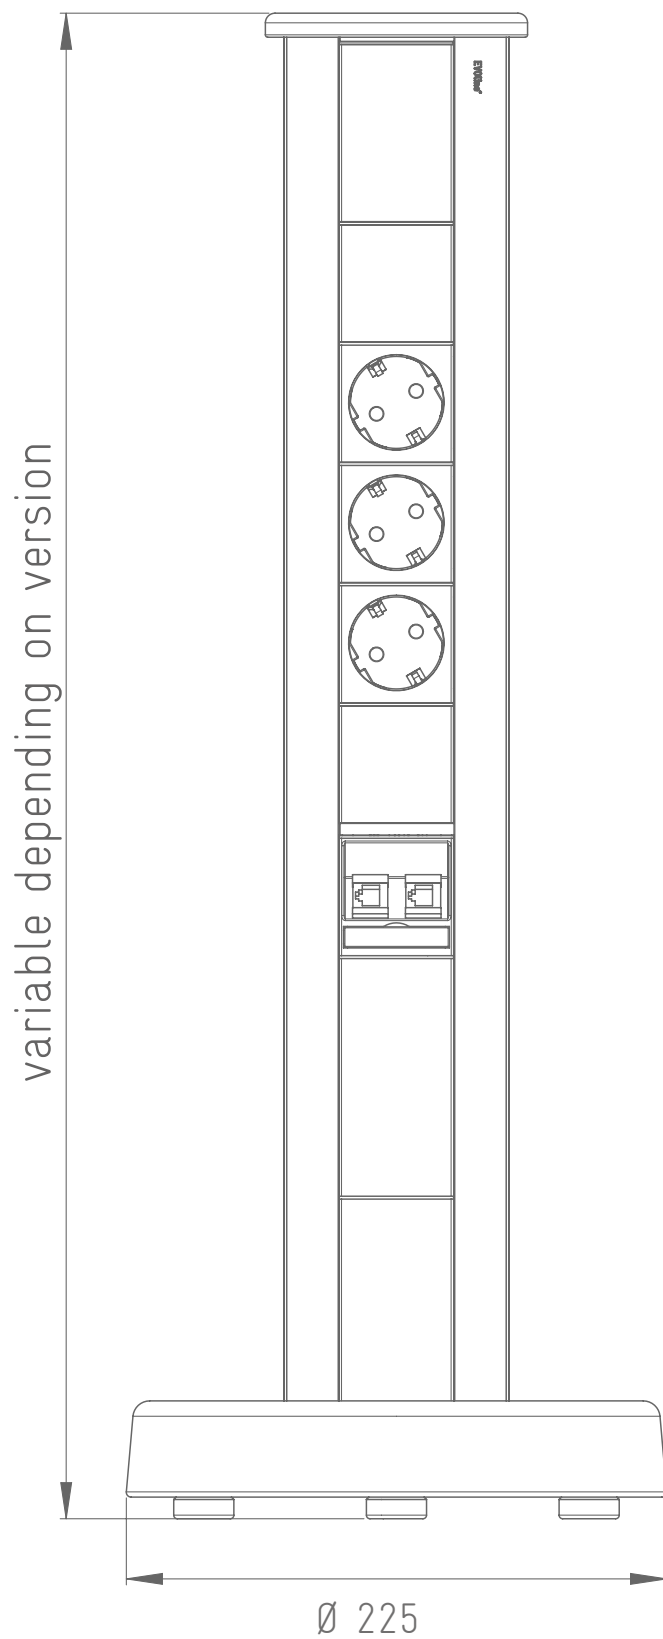


Dimensions in mm


Description	Picture	Specifications	Order Number
<b>EVoline Vertical Standard</b>  Aluminium housing, Cover made of aluminium, black powder-coated. Base made of solid cast iron, black powder-coated. 3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable, 3.0 m with angled plug. 2× data sockets RJ 45 CAT 6 shielded each 3.0 m cable and plug.		Silver anodised	1593 4300 1100
		Black anodised	1593 4300 5000
Dimensions Base: Diameter ø 24,5 cm Height: 4 cm Profile Height: 600 mm.			

Configure your individual EVoline Vertical using the EVoline Modular System

See page 6-7 for instructions
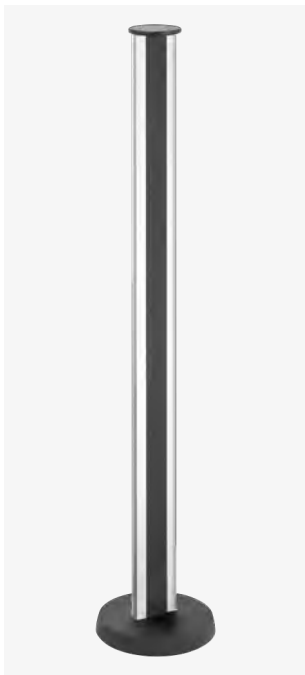
<div><b>Configurable Basic Housing</b> <b>EVoline Vertical</b></div> <div>Aluminium housing, free standing, base made of solid cast iron, black powder-coated. Cover made of aluminium, black powder-coated.</div> <div>Dimensions Base: Diameter ø 24,5 cm Height: 4 cm</div>		Silver anodised	9330 8560 0000
		Black anodised	9330 8570 0000
		Profile height 600 mm max. profile height 1200 mm	
		Profile extension > 600 mm per 50 mm	9330 0130 0000


# EVoline® Decentralised Electrical Distribution

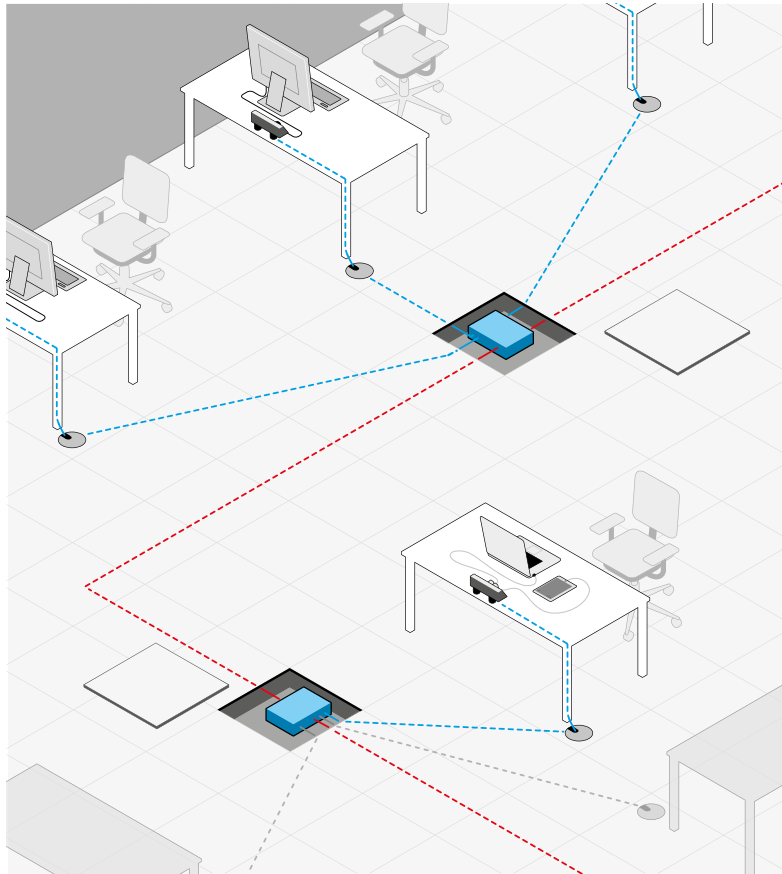

The modern work life becomes more and more flexible. Nowadays adaptable spaces along with mobile furniture and equipment within individually created work areas are standard in many offices already. A conventional approach usually reaches its limits because of the services infrastructure.

The essential importance of a flexible power supply is often underestimated during the planning stages. Long-term consequences can often result in cable chaos with potentially fatal safety defects, questionable auxiliary structures or expensive new cable supplies.

The perfect solution: Decentralised Electrical Distribution from Schulte Elektrotechnik.

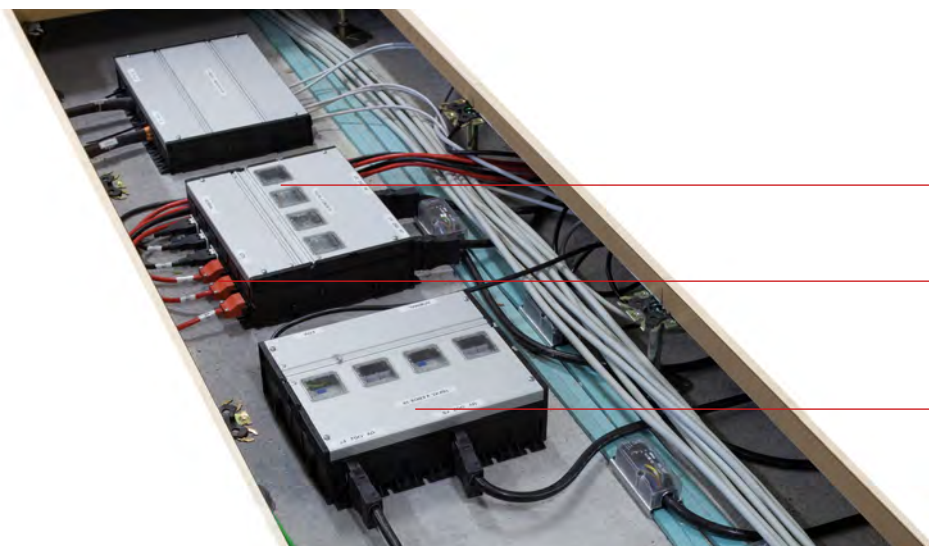


Consolidation Point Current circuit 1  
with protection

Outputs to the e-Place devices, accessible

Consolidation Point Current circuit 2  
with protection

## Conventional Electrical Planning

- Increased space requirements for cables
- High fire loads
- High planning costs
- Expensive installation costs
- Labour intensive installation
- Big distribution boxes
- Mandatory 'Electrics Room'

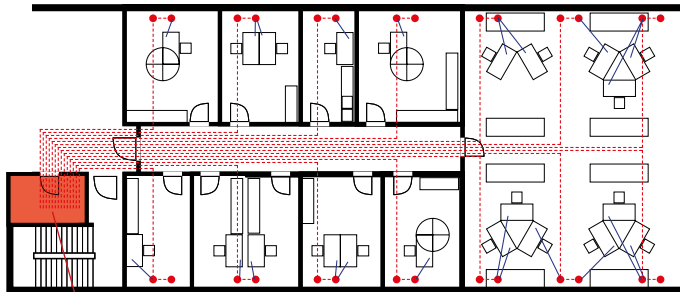


Big  
Technical Room

In the office:  
Conventional electrical planning


## Decentralised Electrical Distribution

- + Smaller 'Electrics Room'
- + Flexibility
- + Easy to change configurations
- + Simplicity
- + Compatible with EnOcean system
- + Safety
- + Aesthetics
- + Future proof
- + Faster installation

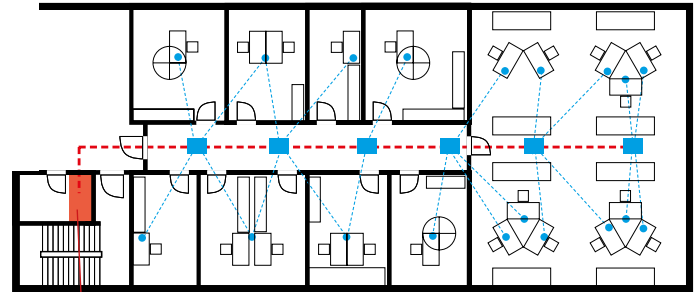


Small  
switchboard

In the office:  
Decentralised electrical distribution  
with EVoline Consolidation Points

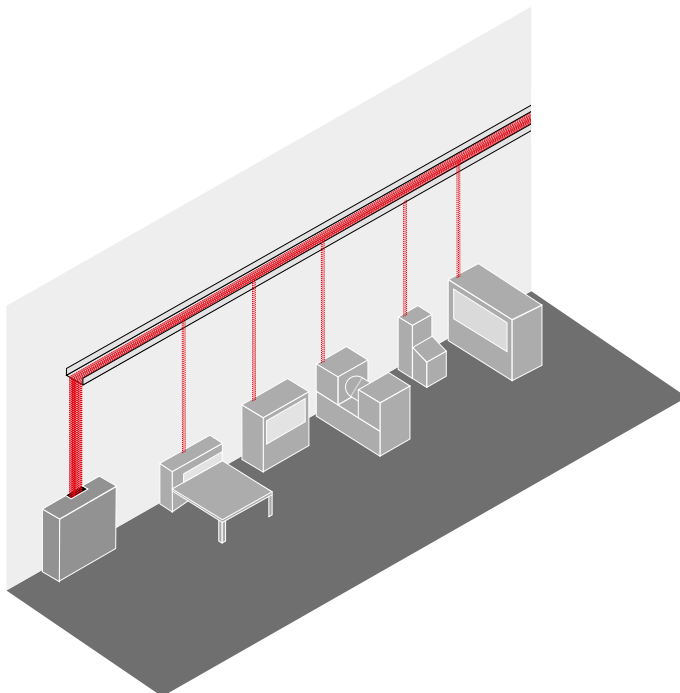

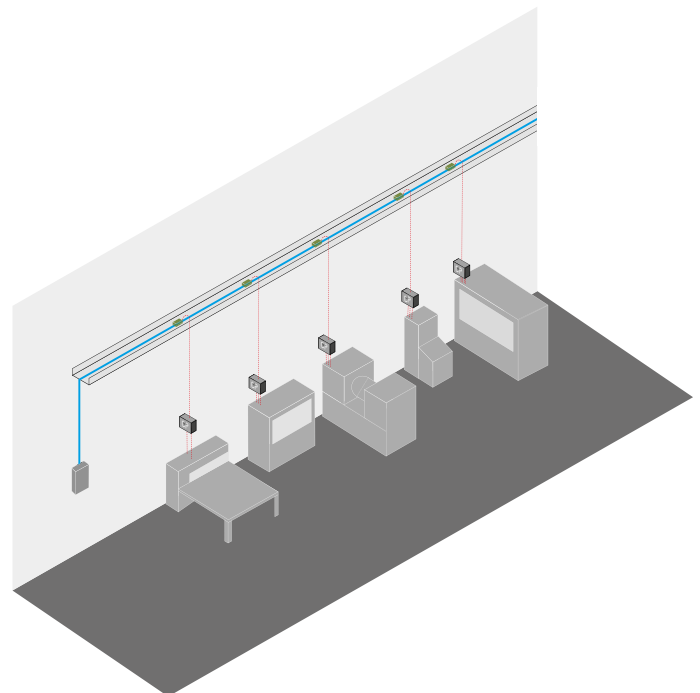

In the production:  
Conventional electrical planning



In the production:  
Decentralised electrical distribution  
with EVoline Consolidation Points



Description	Picture	Specifications	Order Number
<p><b>EVoline Consolidation Point Power Mini</b></p> <p>For the power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 250mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA 3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 3 × 3-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2300
<p><b>EVoline Consolidation Point Power Maxi</b></p> <p>For power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 300mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA 3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 6× 3-pole socket and 1× 5-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2400

# EVoline® Modules




EVoline systems can be configured to individual needs with a wide range of modules available - there is no general solution for the supply of e-connectivity.

Often just power sockets are the sufficient configuration: in a different environment international sockets plus USB Chargers may be the right choice. With telephones, EDP and multimedia connectors options become even more diverse.

Whether a data or a HDMI connector, the individual application defines the requirements.

The chart below gives an overview about country specific socket versions. Deviations may occur.


**Socket VDE (CEE 7/3)**  
**230 V, 16 A**



Plug Type  
F, E+F, C

Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine


**Socket (CEE 7/5)**  
**230 V, 16 A**



Plug Type  
E, E+F, C

France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia


**Socket (BS 1363)**  
**230 V, 3,15 A, 5 A or 13 A**



Plug Type  
G

Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe


**Socket (SEV 1011)**  
**230 V, 10 A, T13**



Plug Type  
J, C

Switzerland, Liechtenstein


**Socket (SEV 1011)**  
**230 V, 16 A, T23**



Plug Type  
J, C

Switzerland, Liechtenstein

**Socket (DS 608842-D1)**  
**230 V, 13 A**



Plug Type  
K, C

Denmark, Greenland

**Socket (DS 608842-D1)**  
**230 V, 13 A, EDV**



Plug Type  
K EDV

Denmark, Greenland


**Socket (CEI 23-16-VII)**  
**230 V, 16 A oder 10 A**



Plug Type  
L, C

Italy, Chile, Cuba


**Socket (AS 3112)**  
**230 V, 10 A**



Plug Type  
I




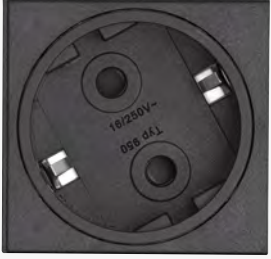
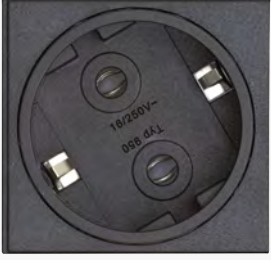
Australia, New Zealand, Papua New Guinea, several Pacific Islands

**Socket (NEMA 5-15)**  
**120 V, 15 A**










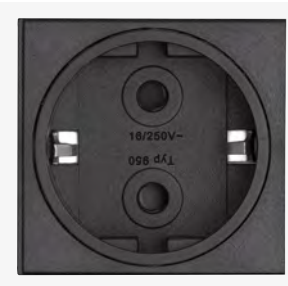


Plug Type  
B

USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Caribbean Islands



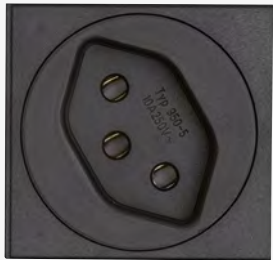


Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>
<b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 0090 0000 black	•	•	•	•		•	•
		9330 0200 0000 red	•	•	•			•	•
		9330 5450 0000 white	•	•	•	•		•	•
		9330 5480 0000 light grey	•	•	•			•	•
<b>Socket 0°, 16 A</b> <b>without Contact-protection, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mmv		9330 6190 0000 black	•	•	•			•	•
		9330 6220 0000 red	•	•	•			•	•
<b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)	•						
<b>Socket 60°, 16 A</b> <b>Contact-protected, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 1050 0000 black	•	•	•	•		•	•
		9330 1430 0000 red	•	•	•	•		•	•
		9330 5460 0000 white	•	•	•	•		•	•
		9330 5490 0000 light grey	•	•	•	•		•	•
<b>Socket 60°, 16 A</b> <b>without Contact-protection, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 6200 0000 black	•	•	•	•		•	•
		9330 6230 0000 red	•	•	•	•		•	•





Technical changes and printing errors reserved. | Similar pictures.





Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>
<b>Socket 90°, 16 A</b> <b>Contact-protected, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 1260 0000 black  9330 1500 0000 red	•	•	•			•	•
<b>Socket 90°, 16 A</b> <b>without Contact-protection, VDE</b>  for plug type: F, C, E+F  Installation dimensions: 50 x 50 mm		9330 6210 0000 black  9330 6240 0000 red	•	•	•			•	•
<b>Socket 0°, 16 A</b> <b>Contact-protected, FR/BE/PL</b>  France, Belgium, Poland for plug type: E, C, E+F  Installation dimensions: 50 x 50 mm,		9330 0250 0000 black  9331 1810 0000 white	•	•	•	•		•	•
<b>Socket 60°, 16 A</b> <b>Contact-protected, FR/BE/PL</b>  France, Belgium, Poland for plug type: E, C, E+F  Installation dimensions: 50 x 50 mm,		9330 1060 0000 black  9332 1650 0000 white	•	•	•	•	•	•	•
<b>Socket 0°, 10 A / 16 A</b> <b>Contact-protected, IT</b>  Italy for plug type: L, C  Installation dimensions: 25 x 50 mm		9331 3180 0000	•	•	•	•	•	•	•


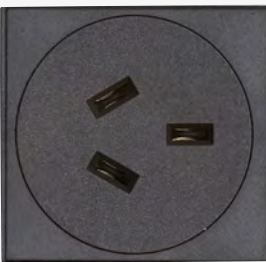

Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One</div>	<div>Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>	<div>Up</div>
<b>Socket 0°, 10 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1100 0000 black	•	•		•	•			•	•
		9330 1480 0000 red	•	•		•				•	•
		9331 9920 0000 white	•	•		•	•			•	•
<b>Socket 0°, 16 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1010 0000 black	•	•		•	•			•	•
		9330 1710 0000 red	•	•		•				•	•
		9332 1210 0000 white	•	•		•	•				
<b>Socket 60°, 10 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1110 0000 black	•		•	•		•	•	•	•
		9330 1490 0000 red	•		•	•		•	•	•	•
<b>Socket 60°, 16 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1070 0000 black	•		•	•		•	•	•	•
		9330 1450 0000 red	•		•	•		•	•	•	•
<b>Socket 270°, 10 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1280 0000 black	•	•		•				•	•
		9330 1550 0000 red	•	•		•				•	•



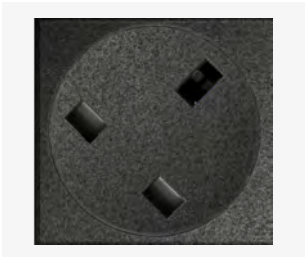









Description	Picture	Order Nr. & Specifications	<div><div>/ Dock / R-Dock</div><div>/ Dock Square</div><div>/ FlipTop Push</div><div>/ FrameDock</div><div>/ One</div><div>/ Port</div><div>/ PortPush</div><div>/ U- &amp; V-Dock</div><div>/ Up</div></div>
<b>Socket 270°, 16 A</b> <b>without Contact-protection, CH</b>  Switzerland for plug type: J, C  Installation dimensions: 50 x 50 mm		9330 1290 0000 black  9330 1520 0000 red	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<b>Socket 0°, 13 A</b> <b>Contact-protected, DK</b>  Denmark, Standard for plug type: K, C  Installation dimensions: 50 x 50 mm		9330 1020 0000 black  9332 1230 0000 white	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<b>Socket 0°, 13 A</b> <b>Contact-protected, DK</b>  Denmark, EDV-coded for plug type: K  Installation dimensions: 50 x 50 mm		9330 1030 0000 black  9330 1730 0000 red	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<b>Socket 60°, 13 A</b> <b>Contact-protected, DK</b>  Denmark, Standard for plug type: K, C  Installation dimensions: 50 x 50 mm		9330 1080 0000 black	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<b>Socket 240°, 13 A</b> <b>Contact-protected, DK</b>  Denmark, Standard for plug type: K, C  Installation dimensions: 50 x 50 mm		9330 7190 0000 black	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>

Description	Picture	Order Nr. & Specifications	<div>/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- &amp; V-Dock / Up /</div>
<div><div><div>Socket 0°, 13 A</div><div>Contact-protected, GB</div></div><div><div>Great Britain</div><div>without fuse,</div><div>for plug type: G</div></div><div>Installation dimensions: 50 x 50 mm</div></div>		<div>9332 0530 0000 black</div> <div>9332 2220 0000 white</div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<div><div><div>Socket 0°</div><div>Contact-protected, GB</div></div><div><div>Great Britain</div><div>with integrated fuse</div><div>for plug type: G</div></div><div>Installation dimensions: 50 x 50 mm</div></div>		<div>9332 0560 0000 black; 3,15 A</div> <div>9332 2250 0000 white; 3,15 A</div> <div>9332 0590 0000 black; 5 A</div> <div>9332 2280 0000 white; 5 A</div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<div><div><div>Socket 45°, 13 A</div><div>Contact-protected, GB</div></div><div><div>Great Britain</div><div>without fuse,</div><div>for plug type: G</div></div><div>Installation dimensions: 50 x 50 mm</div></div>		<div>9332 0540 0000 black</div> <div>9332 2230 0000 white</div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<div><div><div>Socket 45°</div><div>Contact-protected, GB</div></div><div><div>Great Britain</div><div>with integrated fuse</div><div>for plug type: G</div></div><div>Installation dimensions: 50 x 50 mm</div></div>		<div>9332 0570 0000 black; 3,15 A</div> <div>9332 2260 0000 white; 3,15 A</div> <div>9332 0600 0000 black; 5 A</div> <div>9332 2290 0000 white; 5 A</div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>






Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock One / Port / Port Push / U- & V-Dock / Up /				
<b>Socket 90°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm		9330 4430 9000 black	•		•	•	•
<b>Socket 90°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm		9330 4450 9000 black; 3,15 A  9330 4470 9000 black; 5 A	•		•	•	•
<b>Socket 225°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 50 x 50 mm		9332 2750 0000 black	•				•
<b>Socket 225°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 50 x 50 mm		9332 2760 0000 black; 3,15 A  9332 2770 0000 black; 5 A	•				•


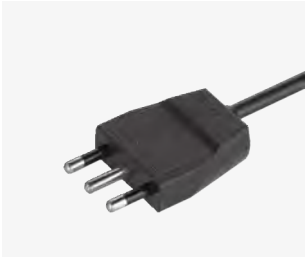



Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One</div>	<div>Port</div>	<div>PortPush</div>	<div>U- &amp; V-Dock</div>	<div>Up</div>
<div>Socket 0°, 10 A</div> <div>without Contact-protection, AUS</div> <div>Australia</div> <div>for plug type: I</div> <div>Installation dimensions: 50 x 50 mm</div>		<div>9330 5240 0000</div> <div>black</div> <div>9330 5270 0000</div> <div>red</div>	<div>•</div>	<div>•</div>	<div>•</div>	<div>•</div>		<div>•</div>	<div>•</div>		
<div>Socket 270°, 10 A</div> <div>without Contact-protection, AUS</div> <div>Australia</div> <div>for plug type: I</div> <div>Installation dimensions: 50 x 50 mm</div>		<div>9330 5890 0000</div> <div>black</div>						<div>•</div>	<div>•</div>	<div>•</div>	
<div>Socket 0°, 10 A Angled Outlet</div> <div>without Contact-protection, AUS</div> <div>Australia</div> <div>for plug type: I,</div> <div>Not suitable for angled plugs.</div> <div>Installation dimensions: 75 x 50 mm</div>		<div>9330 4010 0000</div> <div>black</div> <div>9330 4400 0000</div> <div>red</div>					<div>•</div>	<div>•</div>			









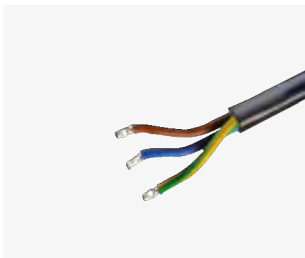



Description	Picture	Order Nr. & Specifications	<div>/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock One / Port / Port Push / U- &amp; V-Dock / Up /</div>
<p><b>Socket 0°, 15 A</b> <b>without Contact-protection</b> <b>USA/CAN</b></p> <p>USA, Canada for plug type: B (NEMA, 5-15)</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 5360 6600 black	<div><div>●</div><div>○</div><div>●</div><div>●</div><div>○</div><div>●</div><div>○</div><div>●</div><div>○</div></div>
<p><b>Socket 60°, 15 A</b> <b>without Contact-protection</b> <b>USA/CAN</b></p> <p>USA, Canada for plug type: B</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 5370 6600 black	<div><div>●</div><div>○</div><div>●</div><div>●</div><div></div><div>●</div><div>○</div><div>●</div><div>○</div></div>
<p><b>Socket 0°, 15 A</b> <b>with Contact-protection,</b> <b>USA/ CAN</b></p> <p>USA, Canada for plug type: B</p> <p>Installation dimensions: 50 x 50 mm</p>		9332 3640 6600 black	<div><div>●</div><div>○</div><div>●</div><div>●</div><div></div><div>●</div><div>○</div><div>●</div><div>○</div></div>
<p><b>Socket 60°, 15 A</b> <b>with Contact-protection,</b> <b>USA/ CAN</b></p> <p>USA, Canada for plug type: B</p> <p>Installation dimensions: 50 x 50 mm</p>		9332 3650 6600 black	<div><div>●</div><div>○</div><div>●</div><div>●</div><div></div><div>●</div><div>○</div><div>●</div><div>○</div></div>
<p><b>Socket 0°, 15 A</b> <b>Angled Outlet</b> <b>with Contact-protection and hinged lid, USA/CAN</b></p> <p>USA, Canada for plug type: B Not suitable for angled plugs.</p> <p>Installation dimensions: 75 x 50 mm</p>		9332 3630 6600 black	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div>●</div><div></div></div>
<p>○ No UL-listed product. Feasibility to be enquired individually.</p> <p>Technical changes and printing errors reserved.   Similar pictures.</p>			




Description	Picture	Order Nr. & Specifications	Dock / R-Dock	Dock Square	FlipTop Push	FrameDock	One	Port	Port Push	U- & V-Dock	Up
<b>Connector 16 A</b> <b>Wieland GST 18i3</b>  Socket GST 18i3 Snap-In for current output  Installation dimensions: 25 x 50 mm		9330 8990 0000 black	●	●	●				●		
<b>Connector 16 A</b> <b>WAGO WINSTA MIDI</b>  Socket WAGO WINSTA Snap-In for current output  Installation dimensions: 25 x 50 mm		9330 8970 0000 black	●	●	●				●		
<b>USB-A Charger</b>  USB Type A Charger, charging function only. Supply voltage: 100-240 VAC  Installation dimensions: 25 x 50 mm		9331 5580 0000 5 V / 1 A, black  9331 7040 0000 5 V / 1 A, white  9332 1330 0000 5 V / 2.1 A, black  9332 1320 0000 5 V / 2.1 A, white	●	●	●	●		●	●	●	●
<b>Double USB-A Charger</b>  2x USB Type A Charger, charging function only. Supply voltage: 100-240 VAC  Installation dimensions: 25 x 50 mm		9332 2960 0000 5 V / 2.1 A max., black  9332 2970 0000 5 V / 2.1 A max., white	●	●	●	●	●	●	●	●	●
<b>USB-C Charger</b>  USB Type C Charger, charging function only. Supply voltage: 100-240 VAC  Installation dimensions: 25 x 50 mm  available from 2nd quarter 2020		9332 4690 0000 5 V / 2,1 A, black  9332 4700 0000 5 V / 2,1 A, white	●	●	●	●		●	●	●	●



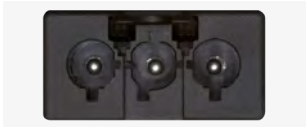








Description	Picture	Order Nr. & Specifications	<div> <div>/ Dock / R-Dock</div> <div>/ Dock Square</div> <div>/ FlipTop Push</div> <div>/ FrameDock</div> <div>/ One</div> <div>/ Port</div> <div>/ Port Push</div> <div>/ U- &amp; V-Dock</div> <div>/ Up</div> </div>							
<b>Power Supply Module with cable and EVOLine PlugFix</b>  Type E+F i.e. Germany 16 A, 3 x 1.5 mm <sup>2</sup> Plug with extra low profile and movable plug face.		9331 0890 0000 Cable length 3 m, black  Cable extension per meter	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and angled plug</b>  Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm <sup>2</sup>		9330 2020 0000 Cable length 3 m, black  9332 2670 0000 Cable length 3 m, white  Cable extension per meter	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and plug</b>  Type J 3 x 1,5 mm <sup>2</sup> i.e. Switzerland		9330 2030 0000 10 A, Cable length 3 m, black  9330 2040 0000 16 A, Cable length 3 m, black  Cable extension per meter	●	●	●	●	●	●	●	●
<b>Power Supply Module with Cable and Overload Circuit Breaker</b>  Plug type J (T12) Power Supply Module with resettable overload switch 10 A 3x 1,5 mm <sup>2</sup>		9332 1090 0000 Cable length 3 m, black mounted to product  Cable extension per meter	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and angled plug</b>  Type G, i.e. Great Britain 13 A, 3 x 1,5 mm <sup>2</sup>		9330 2070 0000 Cable length 3 m, black  Cable extension per meter	●	●	●	●	●	●	●	●




Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One</div>	<div>Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>	<div>Up</div>
<b>Power Supply Module with cable and angled plug</b>  Type K 13 A, 3 x 1.5 mm <sup>2</sup> Denmark. Standard		9330 2050 0000 Cable length 3 m, black  9330 2060 0000 Plug, not angled, EDP-coded, Cable length 3 m black  Cable extension per meter	●	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and Plug</b>  Plug Type L i.e. Italy 16 A, 3 x 1.5 mm <sup>2</sup>		9330 2080 0000 Cable length 3 m, black  Cable extension per meter	●	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and Plug</b>  Type B 115 V. 15 A, AWG 14 i.e. USA, Canada (UL/CSA)		9330 9160 6600 Cable length 3 m, black  Cable extension on request	●	○	○	●	○	●	○	●	○
<b>Power Supply Module with cable and Plug</b>  Type B 115 V. 15 A, AWG 14 i.e. Australia		9330 9130 0000 Cable length 3 m, black  Cable extension on request	●	●	●	●	●	●	●	●	●
<b>Power Supply Module with cable and ferrules</b>  16 A, 3 x 1,5 mm <sup>2</sup>		9330 9510 0000 Cable length 3 m, black  Cable extension per meter	●	●	●	●	●	●	●	●	●

Description	Picture	Order Nr. & Specifications	<div> <div>/ Dock / R-Dock</div> <div>/ Dock Square</div> <div>/ FlipTop Push</div> <div>/ FrameDock</div> <div>/ One</div> <div>/ Port</div> <div>/ Port Push</div> <div>/ U- &amp; V-Dock</div> </div>							
<b>Power Supply Module with cable and connector</b>  16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black		9330 8420 0000 Wieland GST18 plug without lock	•	•	•	•	•	•	•	•
		9331 2490 0000 Wieland GST18 plug with lock	•	•	•	•	•	•	•	•
		9330 8440 0000 WAGO WINSTA MIDI plug without lock	•	•	•	•	•	•	•	•
		9332 4240 0000 Neutrik powerCON plug with lock	•	•	•	•	•	•	•	•
		Cable extension per meter								
<b>Power Output Module with cable and connector</b>  16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black		9330 5810 0000 GST18i3 socket without lock	•	•	•	•	•	•	•	•
		9331 2500 0000 GST18i3 socket with lock	•	•	•	•	•	•	•	•
		9330 5830 0000 WAGO WINSTA MIDI socket without lock	•	•	•	•	•	•	•	•
		9332 4250 0000 Neutrik powerCON socket with lock	•	•	•	•	•	•	•	•
		Cable extension per meter								
<b>Connector 3-pole Plug</b>  Installed in the end cap Colour: black		9330 2680 0000 Plug GST 18i3	•	•	•				•	
		9330 2660 0000 Plug WAGO WINSTA MIDI	•	•	•				•	
<b>Connector 3 pole Socket</b>  Snap-In, installed in the end cap Colour: black		9330 8960 0000 Socket GST 18i3	•	•	•				•	
		9330 8940 0000 Socket WAGO WINSTA MIDI	•	•	•				•	




Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>
<div>RJ45 Data Connector</div> <div>Reichle &amp; De-Massari</div> <div>with Cable and Plug / Socket</div> <div>Installation Dimensions: 25 x 50 mm</div>		<div>9331 2150 0000</div> <div>RJ45 CAT6 shielded</div> <div>0.2 m Cable, Socket</div> <div>9330 8270 0000</div> <div>RJ45 CAT6 unshielded</div> <div>3 m Cable, Plug</div> <div>9330 7860 0000</div> <div>RJ45 CAT6 shielded</div> <div>3 m Cable, Plug</div> <div>9331 0020 0000</div> <div>RJ45 CAT6A shielded</div> <div>3 m Cable, Plug</div>	<div>●</div>	<div>●</div>			<div>●</div>		
<div>RJ45 Data Connector</div> <div>Reichle &amp; De-Massari</div> <div>Angled Outlet with labeling field with Cable and Plug</div> <div>Installation Dimensions: 50 x 50 mm</div>		<div>9331 8200 0000</div> <div>RJ45 CAT6 shielded</div> <div>0.2 m Cable, Socket (RJ45)</div> <div>9331 0010 0000</div> <div>RJ45 CAT6 unshielded</div> <div>3 m Cable, Plug</div> <div>9330 6140 0000</div> <div>RJ45 CAT6 shielded</div> <div>3 m Cable Plug</div> <div>9331 0030 0000</div> <div>RJ45 CAT6A shielded</div> <div>3 m Cable Plug</div>					<div>●</div>	<div>●</div>	
<div>2x RJ45 Data Connector</div> <div>Reichle &amp; De-Massari</div> <div>Angled Outlet with labeling field with Cable and Plug / Socket</div> <div>Installation Dimensions: 50 x 50 mm</div>		<div>9331 2590 0000</div> <div>RJ45 CAT6 shielded</div> <div>0.2 m Cable, Socket (RJ45)</div> <div>9330 4340 0000</div> <div>RJ45 CAT6 unshielded</div> <div>3 m Cable, Plug</div> <div>9330 1230 0000</div> <div>RJ45 CAT6 shielded</div> <div>3 m Cable, Plug</div> <div>9331 0040 0000</div> <div>RJ45 CAT6A shielded</div> <div>3 m Cable, Plug</div>					<div>●</div>	<div>●</div>	

Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock One</div>	<div>Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>
<b>RJ45 Modular Adaptor ELBRO</b>  Modular Adaptor , 1:1 intercon- nected  Installation Dimensions: 25 x 50 mm		9330 6550 0000 RJ45 CAT6 unshielded  9330 8410 0000 (RJ45) CAT6 shielded  9331 4080 0000 (RJ45) CAT6A shielded	●	●				●	
<b>RJ45 Modular Adaptor ELBRO</b>  Angled Outlet with labeling field. Modular Adaptor, 1:1 interconnected  Installation Dimensions: 50 x 50 mm		9330 6560 0000 (RJ45) CAT6 unshielded  9330 5880 0000 (RJ45) CAT6 shielded  9331 4090 0000 (RJ45) CAT6A shielded					●	●	
<b>2x RJ45 Modular Adaptor ELBRO</b>  Angled Outlet with Labeling Field Modular Adaptor, 1:1 interconnected  Installation Dimensions: 50 x 50 mm		9330 6570 0000 (RJ45) CAT6 unshielded  9330 3920 0000 (RJ45) CAT6 shielded  9331 4100 0000 (RJ45) CAT6A shielded					●	●	
<b>2x RJ45 Modular Adaptor ELBRO</b>  Modular Adaptor, 1:1 interconnected Angled: 90°  Installation Dimensions: 25 x 50 mm	 	9331 4870 0000 (RJ45) CAT6 shielded	●					●	





Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One</div>	<div>Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>	<div>Up</div>
<b>VGA-Connector</b>  15 pole HDD socket with screw terminals, Installation dimensions: 25 x 50 mm		9330 0810 0000 with 3 m cable and plug	●		●					●	
<b>VGA-Connector</b>  Angled outlet with labeling field 15 pole HDD socket with screw terminals, Installation dimensions: 50 x 50 mm		9330 2370 0000 with 3 m cable and plug						●		●	
<b>VGA- and Audio Connector</b>  1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 7920 0000 with 3 m cables and plugs	●		●					●	
<b>VGA and Audio Connector</b>  Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm Instal- lation dimensions: 50 x 50 mm		9331 5370 0000 with 3 m cables and plugs						●		●	


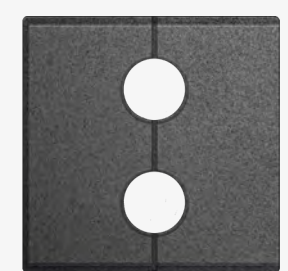


Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FlipTop Push</div> <div>FrameDock</div> <div>One</div> <div>Port</div> <div>Port Push</div> <div>U- &amp; V-Dock</div> <div>Up</div> </div>
<b>Audio Connector 3.5mm</b>  1 x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 0910 0000 with 3 m cable and plug	<div> <div>•</div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>
<b>Audio Connector 3.5mm</b>  Angled outlet with labeling field. 1 x Stereo Jack socket 3.5 mm Installation dimensions: 50 x 50 mm		9330 2460 0000 with 3 m cable and plug	<div> <div>•</div> <div></div> <div></div> <div></div> <div></div> <div></div> <div>•</div> <div>•</div> </div>
<b>DVI-I Connector</b>  Dual Link. 24+5 pole. for digital and analogue signals Installation dimensions: 25 x 50 mm		9331 7730 0000 with 0.2 m Cable and Socket  9331 7700 0000 with 3 m Cable and Plug	<div> <div>•</div> <div>•</div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>
<b>DVI-I Connector</b>  Dual Link. 24+5 pole. for digital and analogue signals Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 7740 0000 with 0.2 m Cable and Socket  9331 7710 0000 with 3 m Cable and Plug with 5 m Cable and Plug	<div> <div></div> <div></div> <div></div> <div>•</div> <div>•</div> <div></div> <div>•</div> <div>•</div> </div>










Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /					
<b>HDMI-Connector</b>  HDMI connector with gilded contacts. Installation dimensions: 25 x 50 mm		9330 6060 0000 HDMI 1.4 connector with 0.3 m Cable and Socket  9331 8940 0000 HDMI 2.0 connector with 0.2 m Cable and Socket  9330 6070 0000 HDMI 1.4 connector with 3 m Cable and Plug with 5 m Cable and Plug  9332 2800 0000 HDMI 2.0 connector with 3 m Cable and Plug	•	•			•	
HDMI-Connector  Angled outlet with labeling field HDMI connector with gilded contacts. Installation dimensions: 50 x 50 mm		9330 6080 0000 HDMI 1.4 connector with 0.3 m Cable and Socket  9331 8950 0000 HDMI 2.0 connector with 0.2 m Cable and Socket  9330 6090 0000 HDMI 1.4 connector with 3 m Cable and Plug with 5 m Cable and Plug  9332 2810 0000 HDMI 2.0 connector with 3 m Cable and Plug					•	•
							•	•
							•	•
							•	•
<b>DisplayPort-Connector</b>  for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm		9331 7510 0000 with 0.4 m Cable and Socket	•	•				
<b>DisplayPort-Connector</b>  Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm		9331 7520 0000 with 0.4 m Cable and Socket					•	•




Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FlipTop Push</div> <div>FrameDock</div> <div>One Port</div> <div>Port Push</div> <div>U- &amp; V-Dock</div> <div>Up</div> </div>
<b>USB 3.0 Connector</b>  USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		9331 8620 0000 0.2 m Cable and Socket  9331 1450 0000 1 m USB Cable Plug USB 3 Type A  3 m USB Cable Plug USB 3 Type A	<div> <div>•</div> <div></div> <div>•</div> <div></div> <div></div> <div></div> <div></div> </div>
<b>USB 3.0 Connector</b>  USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 8630 0000 0.2 m Cable and Socket  9331 1460 0000 1 m USB Cable, Plug USB 3 Type A  3 m USB Cable Plug USB 3 Type A	<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div>•</div> <div>•</div> </div>
<b>USB 3.1 Connector</b>  USB 3.1 type C only suitable for power supply. Max. Current: 3A.  Installation dimensions: 25 x 50 mm		9331 9710 0000 0.2 m USB Cable Socket USB 3.1 Type C	<div> <div>•</div> <div>•</div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>
<b>USB 3.1 Connector</b>  USB 3.1 type C Angled outlet with labeling field. only suitable and power supply. Max. Current: 3A.  Installation dimensions: 50 x 50 mm		9331 9870 0000 0.2 m USB Cable Socket USB 3.1 Type C	<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div>•</div> <div>•</div> </div>

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /				
<p><b>Audio Connector and stainless steel push-button with ring LED</b></p> <p>1x Stereo Jack Socket 3.5 mm 1x Push-Button Operating voltage: 24 V<sub>AC/DC</sub> Operating current: 10 mA Angled outlet and labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9490 0000</p> <p><b>Audio</b> Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p><b>Push-Button</b> with 3 m Cable without plug</p>				•	•
<p><b>Audio Connector and Data Socket Reichle &amp; De-Massari Cat. 6</b></p> <p>1x Stereo Jack socket 3.5 mm 1x Data Socket with cable Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7610 0000</p> <p><b>Audio</b> Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p><b>Data</b> RJ45 Cat. 6 Socket with 3 m Cable, shielded and RJ45 Plug</p>				•	•
<p>Audio Connector and Data Socket Elbro</p> <p>1x Cat.6 Modular-Adaptor, shielded 1x Stereo Jack socket 3.5 mm Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7800 0000</p> <p><b>Audio</b> Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p><b>Data</b> Modular-Adaptor RJ45 (without Cable)</p>				•	•
<p><b>HDMI and Audio Socket 3.5mm</b></p> <p>1x HDMI 1.4 connector with gilded contacts. 1x Stereo Jack socket 3.5 mm Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 5100 0000</p> <p><b>Audio</b> Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p><b>HDMI</b> with 3 m Cable and Plug</p>				•	•






Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FlipTop Push</div> <div>FrameDock</div> <div>One</div> <div>Port</div> <div>Port Push</div> <div>U- &amp; V-Dock</div> <div>Uv</div> </div>							
<b>Cable Outlet Module</b>  1 cable passage Colour: black  Installation dimensions: 50 x 50 mm		9331 3790 0000 Ø 8 mm	•		•		•		•	
		9331 0560 0000 Ø 12 mm	•		•		•		•	
		9331 1670 0000 Ø 17 mm	•		•		•		•	
		Additional diameters on demand								
<b>Cable Outlet Module</b>  2 cable passages Colour: black  Installation dimensions: 50 x 50 mm		9331 3800 0000 Ø 8 mm	•		•		•		•	
		9331 1930 0000 Ø 12 mm	•		•		•		•	
		Additional diameters on demand								
<b>Cable Guide Modul</b>  Clamp for 3 cables 2x 8 mm 1x 12 mm Colour: black  Installation dimensions: 25 x 50 mm		9331 3600 0000 Holder for 3 Cables					•			
<b>Cable assortment</b>  3.0 m cables 2 plugs  cable extension and variations available on request		9331 0350 0000 HDMI Cable	•	•	•	•	•	•	•	•
		9331 3060 0000 VGA Cable	•	•	•	•		•	•	•
		9331 3760 0000 Displayport Cable	•	•	•	•		•	•	•
		9331 3720 0000 Audio Stereo Cable	•	•	•	•		•	•	•
		9331 1060 0000 PatchCable CAT6, shielded	•	•	•	•	•	•	•	•
		9331 9810 0000 USB 3.0 Cable (Type A)	•	•	•	•	•	•	•	•




Description	Picture	Order Nr. & Specifications	<div> <div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FlipTop Push</div> <div>FrameDock</div> <div>One</div> <div>Port</div> <div>Port Push</div> <div>U- &amp; V-Dock</div> <div>Up</div> </div> </div>
<b>Installation Space</b>  Profile with black plastic cover to enable later insertation of additional modules.		9330 7990 0000 Profile length: 15 mm  9330 5620 0000 Profile length: 25 mm  9330 5630 0000 Profile length: 50 mm  9330 5640 0000 Profile length: 75 mm  9330 5650 0000 Profile length: 100 mm  9330 6390 0000 Profile length: 150 mm	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<b>Labeling Field</b>  For individual labeling of modules.  Installation dimensions: 15 x 50 mm		9330 9000 0000 black	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<b>Cover Plate</b>  made of black plastic, provides distance between current modules, future changes are not possible		9330 0150 0000 Dimensions: 5 x 50 mm  9330 7980 0000 Dimensions: 15 x 50 mm  9330 0920 0000 Dimensions: 25 x 50 mm  9330 0130 0000 Dimensions: 50 x 50 mm  9330 0550 0000 Dimensions: 75 x 50 mm  9330 0110 0000 Dimensions: 100 x 50 mm  9330 7650 0000 Dimensions: 150 x 50 mm	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /							
<b>ON / OFF switch</b>  230 V, 2-pole, illuminated in blue. For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm		9330 0010 0000	•	•	•	•	•	•	•	•
<b>ON / OFF switch</b>  230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm		9330 6650 0000	•	•	•	•		•	•	
<b>ON / OFF switch</b>  230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment. Installation dimensions: 50 x 50 mm		9330 6660 0000		•				•	•	
<b>1x Stainless steel pushbutton with blue LED ring</b>  Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately. LED operating data: 24 V = / 7 mA  Installation dimensions: 25 x 50 mm		9331 9300 0000 with Screw terminals  9331 9240 0000 with 3 m cable and ferrules	•		•	•		•		•
			•		•	•		•		•

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /					
<b>1x Stainless steel pushbutton with blue LED ring, angled outlet</b>  Pushbutton potential-free Switching data: 240 V ≈ / 3 A LED can be connected separately. LED operating data: 24 V ≈ / 7 mA, labeling field Installation dimensions: 50 x 50 mm		9331 9320 0000 with Screw terminals  9331 9260 0000 with 3 m cable and ferrules					•	
<b>1x Stainless steel pushbutton with blue LED ring, angled outlet</b>  Pushbutton potential-free Switching data: 240 V ≈ / 3 A LED can be connected separately. LED operating data: 24 V ≈ / 7 mA Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 9330 0000 with Screw terminals 9331 9270 0000 with 3 m cable and ferrules					•	
<b>Master / Slave Switch 2-pole</b>  controls downstream sockets (slave sockets), available only as combination of upstream master and downstream slave sockets Switching threshold: adjustable from 20 to 100 mA, Rated voltage: 250 V, Rated current: 16 A, 2-pole, Protection class IP20, black plastic frame Installation dimensions: 75 x 50 mm		9330 6160 0000	•	•	•	•	•	•



Description	Picture	Order Nr. & Specifications	<div> <div>/ Dock / R-Dock</div> <div>/ Dock Square</div> <div>/ FlipTop Push</div> <div>/ FrameDock</div> <div>/ One</div> <div>/ Port</div> <div>/ PortPush</div> <div>/ U- &amp; V-Dock</div> <div>/ Up</div> </div>					
<b>Residual Current Device</b>  RCD/RCCB 2-pole characteristic B, type A  Installation dimensions: 100 x 50 mm		9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA  9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA	•	•	•	•	•	
<b>Circuit Breaker</b> <b>MCB</b> 2-pole characteristic B  Installation dimensions: 100 x 50 mm		9330 1140 0000 Rated current: 10 A  9330 1150 0000 Rated current: 13 A  9330 0400 0000 Rated current: 16 A	•	•	•	•	•	
<b>FI/LS-switch</b>  RCBO pulse-current sensitive type A characteristic B  Installation dimensions: 100 x 50 mm		9311 8860 0000 Rated current: 25 A Rated fault current: 30 mA	•	•	•	•	•	
<b>Surge Protector</b>  With optical indicator  Installation dimensions: 50 x 50 mm		9331 4770 0000 rated leakage current 1,5 kA maximum leakage current 5 kA,	•	•	•	•	•	•
<b>Overvoltage protector</b>  Model like Wieland GST 18i3 Protection level UP L/N PE 1.5KV		1599 0910 4000	•	•	•	•	•	•

Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FlipTop Push</div>	<div>FrameDock</div>	<div>One</div>	<div>Port</div>	<div>Port Push</div>	<div>U- &amp; V-Dock</div>	<div>Up</div>
<div><b>Overload Circuit Breaker</b></div> <div>required for 3 sockets or more in Australia.</div> <div>1-pole.</div> <div>Type: Sliding switch</div> <div>Installation dimensions: 25 x 50 mm</div>		<div>9330 5840 0000</div> <div>Australien 10 A, 250 V</div>	●	●	●	●		●	●	●	
<div><b>Overload Circuit Breaker</b></div> <div>Switch-on overload switch</div> <div>Installation dimensions: 25 x 50 mm</div>		<div>9332 1080 0000</div> <div>Switzerland Fuse:</div> <div>10 A, 230 V~</div> <div>9332 0380 6600</div> <div>U.S.A. (from the 4th socket)</div> <div>Fuse: 15 A , 125 V~</div>	●	●	●	●		●	●	●	
<div><b>Power Supply Module with Cable and Overload Circuit Breaker</b></div> <div>Plug Type: J (T13)</div> <div>Switch-on overload switch (10 A)</div> <div>3 x 1,5 mm²</div> <div>e.g. Schweiz</div>		<div>9332 1090 0000</div> <div>Cable length 3 m</div> <div>mounted to product</div>	●	●	●	●		●	●	●	

# How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. \*



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System  
(this example: FrameDock).



# Combination of Interchangeable Modules



Your usage requirements are as flexible as you are.

So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.




Single Modules

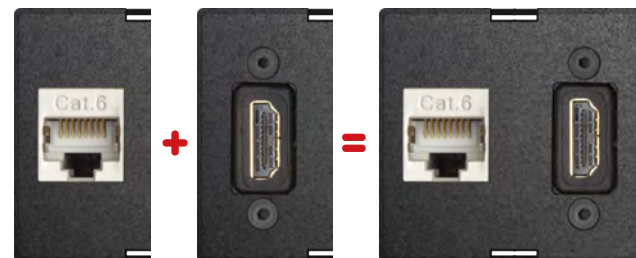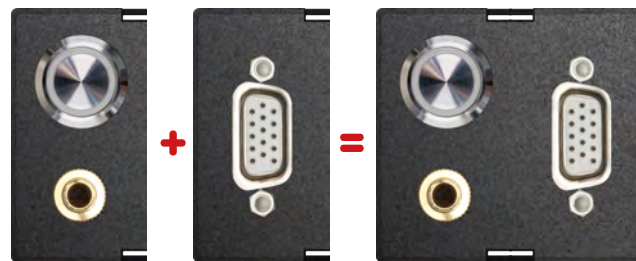


Interchangeable Modulee



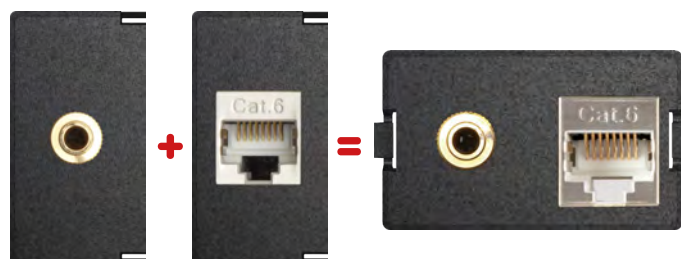



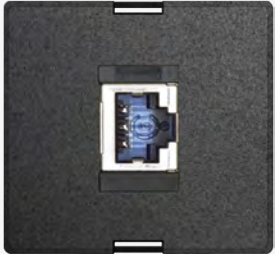


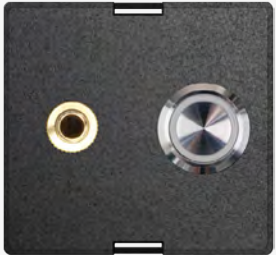
Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square






Examples for the configuration of the interchangeable Modules of Port Push



Description	Picture	Order Nr. & Specifications	<div> <div>FlipTop Push</div> <div>FrameDock</div> <div>V-Dock</div> <div>Dock Square</div> <div>Port Push</div> <div>U-Dock</div> </div>
<b>RJ45 Modular Adaptor ELBRO</b>  RJ45 to RJ45, 1:1 interconnected for Patch cable.  1/2 Module		9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable  9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable  9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/2 Module		9331 8420 0000 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 0000 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 0000 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 0000 RJ45 Cat6A shielded with 3m cable and plug	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/1 Module		9331 8420 2200 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 2200 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 2200 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 2200 RJ45 Cat6A shielded with 3m cable and plug	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div> <div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>




Description	Picture	Order Nr. & Specifications	FlipTop Push	FrameDock	V-Dock	Dock Square	Port Push	U-Dock
<b>VGA-Connector</b>  15 pole HDD socket with screw connector  1/2 Module		9331 8550 0000 with socket–socket (without cable)  9331 8430 0000 with 0.2 m cable and socket  9331 8100 0000 with 3 m cable and plug	•	•	•	•	•	•
<b>VGA-Connector</b>  15 pole HDD socket with screw connector  1/1 Module		9331 8550 2200 with socket–socket (without cable)  9331 8430 2200 with 0.2 m cable and socket  9331 8100 2200 with 3 m cable and plug	•	•	•	•	•	•
<b>Audio Connector 3,5 mm</b>  1x Stereo Jack socket 3.5 mm  1/2-Module		9331 8220 0020 with 0.2 m cable and socket  9331 8220 0000 with 3 m cable and socket  9331 8210 0000 3 m cable and plug	•	•	•	•	•	•
<b>Audio Connector 3,5 mm</b> 1x Stereo Jack socket 3.5 mm  1/2-Module		9331 8220 2220 with 0.2 m cable and socket  9331 8220 2200 with 3 m cable and socket  9331 8210 2200 with 3 m cable and plug	•	•	•	•	•	•

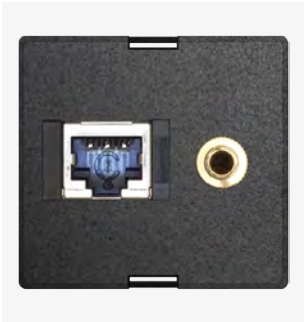


Description	Picture	Order Nr. & Specifications	<div> <div>FlipTop Push</div> <div>FrameDock</div> <div>V-Dock</div> <div>Dock Square</div> <div>Port Push</div> <div>U-Dock</div> </div>
<p><b>Stainless steel pushbutton with blue LED ring</b></p> <p>Pushbutton potential-free Switching data: 240 VAC/DC, 3 A LED can be connected separately. LED operating data: 24 VAC/DC, 7 mA</p> <p>1/2 Module</p>		<p>9331 8870 0000 with Screw terminals</p> <p>9331 8850 0000 with 3 m cable</p>	<div> <div>• • • • •</div> <div>• • • • •</div> </div>
<p><b>Stainless steel pushbutton with blue LED ring</b></p> <p>Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p> <p>1/1 Module</p>		<p>9331 8870 2200 with Screw terminals und blauer Ring-LED</p> <p>9331 8850 2200 with 3 m cable</p>	<div> <div>• • • •</div> <div>• • • •</div> </div>
<p><b>Audio connector and stainless steel pushbutton with blue LED ring</b></p> <p>1x stereo jack socket 3.5 mm 1x pushbutton, potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p> <p>1/2 module</p>		<p>9331 8880 0000 Audio 3 m cable</p> <p>Pushbutton 3 m cable</p>	<div> <div>• • • • •</div> </div>
<p><b>Audio connector and stainless steel pushbutton with blue LED ring</b></p> <p>1x stereo jack socket 3.5 mm 1x pushbutton, potential-free Switching data: 240 V = / 3 A LED can be connected separately LED operating data: 24 V = / 7 mA</p> <p>1/1 module</p>		<p>9331 8880 2200 Audio 3 m cable</p> <p>Pushbutton 3 m cable</p>	<div> <div>• • • •</div> </div>








Description	Picture	Order Nr. & Specifications	FlipTop Push	FrameDock	V-Dock	Dock Square	Port Push	U-Dock
<b>HDMI-, VGA- and Audioconnector</b>  HDMI 1.4 socket with gilded Contacts, 15 pole HDD VGA socket, Stereo Jack socket with cable  1/1 Module		9331 9000 0000 HDMI, VGA, Audio: Each with 3 m cable and plug  9331 9000 0000 HDMI, VGA, Audio: Each with 5 m cable and plug  9331 9410 0000 HDMI, VGA, Audio: 0,2 m cable and socket	•	•	•	•		
<b>Audio-Connector 3,5 mm with CAT6-Data socket Reichle &amp; De-Massari</b>  1 × Stereo Jack socket, 1 × Data socket  1/2-Module		9331 8680 0000 Audio: Connector 3,5 mm with 3 m cable and plug  Data RJ45 Cat.6 shielded 3 m cable and plug	•	•	•	•	•	•
<b>Audio-Connector 3,5 mm with CAT6-Data socket Reichle &amp; De-Massari</b>  1 × Stereo Jack socket, 1 × Data socket  1/1-Module		9331 8680 2200 Audio: Connector 3,5 mm with 3 m cable and plug  Data RJ45 Cat.6 shielded 3 m cable and plug	•	•	•	•		

Description	Picture	Order Nr. & Specifications	FlipTop Push FrameDock V-Dock Dock Square Port Push U-Dock /				
<b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b>  1 × Stereo Jack socket 1 × Modular adaptor RJ45 RJ45, 1:1 interconnected for Patch cable  1/2 Module		9331 8690 0000 Audio: Connector 3,5 mm with 3 m cable	•	•	•	•	•
		Data socket to socket RJ45 Cat.6 shielded					
		9332 0110 0000 Audio: Connector 3,5 mm without cable	•	•	•	•	•
<b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b>  1 × Stereo Jack socket, 1 × Cat.6 Modulearadaptor  1/1 Module		9331 8690 2200 Audio: Connector 3,5 mm with 3 m cable	•	•	•	•	
		Data RJ45 Cat.6 shielded socket to socket RJ45					
		9331 0110 2200 Audio: Connector 3,5 mm without cable	•	•	•	•	
		Data RJ45 Cat.6 shielded socket to socket RJ45					

Description	Picture	Order Nr. & Specifications	FlipTop Push	FrameDock	V-Dock	Dock Square	Port Push	U-Dock
<b>DVI-I Connector</b>  Dual-Link, 24 + 5 pole  1/2 Module		9331 8110 0000 with 0.2 m cable and socket  9331 8440 0000 with 3 m cable and plug	•	•	•	•	•	
<b>DVI-I Connector</b>  Dual-Link, 24 + 5 pole  1/1 Module		9331 8110 2200 with 0.2 m cable and socket  9331 8440 2200 with 3 m cable and plug	•	•	•	•		
<b>HDMI-Connector</b>  with gilded contacts  1/2 Module		9331 8540 0000 HDMI 1.4 with socket – socket (without cable)  9331 8120 0000 HDMI 1.4 with 0.2 m cable and socket  9331 9540 0000 HDMI 2.0 with 0.2 m cable and socket  9331 8130 0000 HDMI 1.4 with 3 m cable and plug with 5 m cable and plug  9332 2820 0000 HDMI 2.0 with 3 m cable and plug	•	•	•	•	•	

Description	Picture	Order Nr. & Specifications	/ FlipTop Push / FrameDock / V-Dock / Dock Square / Port Push / U-Dock /				
<b>HDMI-Connector</b>		9331 8120 2200 HDMI 1.4 with 0.2 m cable and socket	•	•	•	•	
with gilded contacts		9331 9540 2200 HDMI 2.0 with 0.2 m cable and socket	•	•	•	•	
1/1 Module		9331 8130 2200 HDMI 1.4 with 3 m cable and plug with 5 m cable and plug	•	•	•	•	
		9332 2820 2200 HDMI 2.0 with 3 m cable and plug	•	•	•	•	
<b>Display Port-Connector</b>		9331 8140 0000 with 0.4 m cable and socket	•	•	•	•	•
DP 1.2 compliant							
1/2 Module							
<b>Display Port-Connector</b>		9331 8140 2200 with 0.4 m cable and socket	•	•	•	•	
DP 1.2 compliant							
1/1 Module							

Description	Picture	Order Nr. & Specifications	FlipTop Push	FrameDock	V-Dock	Dock Square	Port Push	U-Dock
<b>USB-Connector 3.0</b>		9331 8530 0000 with socket – socket Type A	•	•	•	•	•	
USB 3.0 Type A		9331 8650 0000 with 0.2 m cable and socket	•	•	•	•	•	
1/2-Module		9331 8460 0000 with 3 m cable and plug	•	•	•	•	•	
<b>USB-Connector 3.0 Type A</b>		9331 8650 2200 with 0.2 m cable and socket	•	•	•	•		
USB 3.0 Type A		9331 8460 2200 with 3 m cable and plug	•	•	•	•		
1/1-Module								
<b>USB-Connector 3.1 Type C</b>		9331 9720 0000 with 0.2 m USB cable and socket	•	•	•	•	•	
USB 3.1 type C Suitable just for power supply. Max. current: 3 A								
1/2 Module								
<b>USB-Connector 3.1 Type C</b>		9331 9720 2200 with 0.2 m USB cable and socket	•	•	•	•		
USB 3.1 type C Suitable just for power supply. Max. current: 3 A								
1/1 Module								

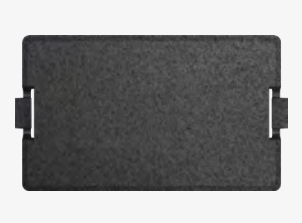Description	Picture	Order Nr. & Specifications	<div>FlipTop Push</div> <div>FrameDock</div> <div>V-Dock</div> <div>Dock Square</div> <div>Port Push</div> <div>U-Dock</div> <div></div>				
<b>WireLane Adaptor for FlipTop Push</b>  to connect the WireLane		9331 8700 0000 black	•	•		•	
<b>Cable Outlet Module</b>  for one cable like: Patch cable, audio cable etc.  1/1 module		9331 8230 0000 Empty module, without cable	•	•	•	•	
<b>Cable Outlet Module</b>  for one cable like: Patch cable, audio cable etc.		9332 0100 0000 Empty module, without cable				•	
<b>Installation Space</b>  Profile to enable later insertion of interchangeable modules		9331 8300 0000	•	•	•	•	
<b>Installation Space for EVOLine Port Push</b>  Profile to enable later insertion of interchangeable modules		9332 1410 0000				•	

Remote on/off control without cable or battery from a distance.

# EVoline® Kinetics






EVoline Kinetics modules make it possible. Touching the switch with a finger generates enough energy to send an encoded wireless signal as far as 30 metres in enclosed spaces.

The EVoline receiver can be integrated into our products to switch electrical sockets. The transmitters can also be installed in EVoline products. Alternatively, they can be freely positioned with a mounting frame.





Description	Picture	Order Nr. & Specifications	<div>/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- &amp; V-Dock / Up /</div>
<p><b>Kinetics Wireless Receiver</b> <b>2 pole module</b></p> <p>switching states ON/OFF, with display switching status, green, 230 V~ Actuator</p> <p>Switching capacity of max. 16 A, switches devices such as lights, for EnOcean Alliance transmitters</p> <p>installation dimensions: 75 x 50 mm</p>		<p>9330 6400 0000</p> <p>Module may be ordered in assembled products</p>	<div><div></div><div></div><div></div><div></div><div></div><div></div></div>
<p><b>Kinetics Wireless Transmitter</b> <b>Built-in module</b></p> <p>Controls all receivers of the EnOcean Alliance. Range up to 30 m.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6420 0000</p> <p>with 1 rocker switch and 1 labelling field</p> <p>9330 6410 0000</p> <p>with 2 rocker switches and 2 labelling fields</p>	<div><div></div><div></div><div></div><div></div><div></div><div></div></div>
<p><b>Kinetics Wireless Transmitter</b> <b>with frame</b></p> <p>to switch on/off Controls all EnOcean receivers, range up to 30 m</p> <p>Installation dimensions: 60 x 65 mm</p>		<p>1599 0907 6900</p> <p>with 1 rocker switch and 1 labelling field, black frame</p> <p>1599 0907 8200</p> <p>with 1 rocker switch and 1 labelling field, pure white frame</p> <p>1599 0907 6800</p> <p>with 2 rocker switches and 2 labelling fields, black frame</p> <p>1599 0907 8100</p> <p>with 2 rocker switches and 2 labelling fields, pure white frame</p>	<div><div></div><div></div><div></div><div></div><div></div><div></div></div>


Extremely thin. Fits behind any cupboard or cabinet. Prevents tripping hazards.

# EVoline® Plug | PlugFix




The EVoline Plug's ultra-low profile easily fits behind any piece of furniture. The intelligent joint mechanism transforms the handle into a lever – and the plug can be easily removed from the socket. Even in case of a pull on the cable, the plug is released without damage.

EVoline Plug Fix as flat plug solution for manufacturers cannot be dismantled. Our range offers versions with wire end ferrules, couplings, 3-gang socket rail or connectors.



EVoline® Plug




EVoline® PlugFix

Dimensions in mm



reddot design award  
winner 2011



ausgezeichnet mit dem 1. Preis  
Universal Home: Product Design  
Designpreis des Landes  
Nordrhein-Westfalen



Designpreis  
Deutschland  
2011  
NOMNIERT



interior  
innovation  
award  
2011  
Winner



Ausgezeichnet with der  
IENA Goldmedaille



universal  
design  
award 2010  
universal  
design  
consumer  
favorite 2010



2012



### Only with EVOLine Plug:

Movable plug face  
for ease of use and  
to prevent tripping  
hazards








### PlugFix

With fixed cable  
for OEM volume  
orders.



### Only 5 mm

housing thickness

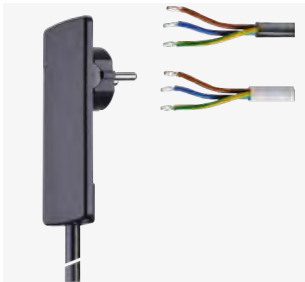Description	Picture	Specifications	Order Number
<b>EVoline Plug</b>  Screwable ultra-low profile grounded plug with movable face, for wire diameters of 0.75 mm² to 1.5 mm², 250 V / 16 A		black  white	1510 0000 0100  1510 0000 0300
<b>EVoline PlugFix</b>  Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² connected to 3 gang power bar EVoline Express, 250 V / 16 A		black, with 1.5 m Cable  white, with 1.5 m Cable	1510 0015 6100  1510 0015 6300
<b>EVoline PlugFix</b>  Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² connected to socket coupling with contact protection, 250 V / 16 A		black, with 3 m Cable  black, with 1.5 m Cable  white, with 3 m Cable  white, with 1.5 m Cable	1510 0030 5100  1510 0015 5100  1510 0030 5300  1510 0015 5300
<b>EVoline PlugFix</b>  Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm² and connector. Select from Wieland GST18 or WAGO WINSTA sockets.		GST 18i3 black 1.5 m Cable and socket WAGO WINSTA black 1.5 m Cable and socket	1510 0015 2100  1510 0015 8100
<b>EVoline PlugFix</b>  Ultra-low profile grounded plug with movable face, with Fix		black, with 1.5 m Cable  white, with 1.5 m Cable	1510 0015 1100  1510 0015 1300


# EVoline® Qi Charger



EVoline Charger Qi allows charging of any Qi-capable device without cables or any other accessories on a single charging station.


Installed below the desk or work surface makes the charger completely invisible. It also may be mounted into a Ø 80 mm opening.

Place the device to be charged simply on the work surface above – pure minimalism.

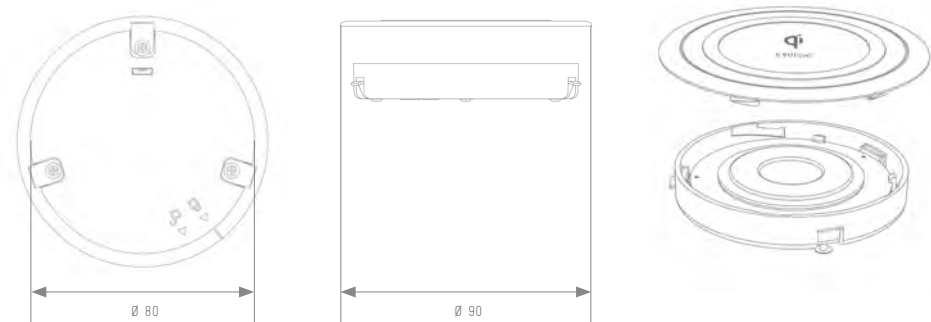

Dimensions in mm

Housing	Plastics, black
Lid	Plastics, black Printing white
Installation	Embedding Mounting
WPC Standard	Spec. 1.2.2 "Qi"
Qi-Certificate	ID 2409

Description	Picture	Specifications	Order Number
<p><b>EVoline Qi Charger</b></p> <p>Wireless charger according WPC standard Spec. 1.2.2 "Qi". The coil is mounted below the work surface or is mounted into an opening Ø 80 mm.</p> <p>Operating voltage 9 V Charging capacity max. 10 W</p> <p>Mains adapter: 1.2 m USB connection cable</p>		<p>USB power supply with Euro plug</p>	<p>1599 0911 2800</p>



### Wireless charging

- resonant inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges any Qi compatible device
- transmitter coil is active only when a connection to the receiving device is made





# EVoline® Express




EVoline Express Type 910 for a consistent modular power supply provides a flexible number of power sockets. Self extinguishing plastics, sockets with contact protection and the testing of every single product before dispatch provides highest safety. Protection and switch modules are available as well.

International socket versions available. Various colours available.

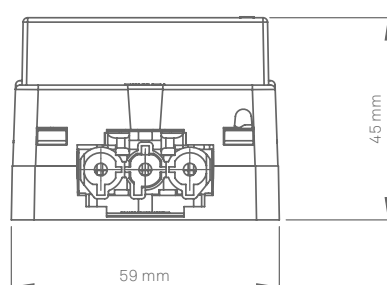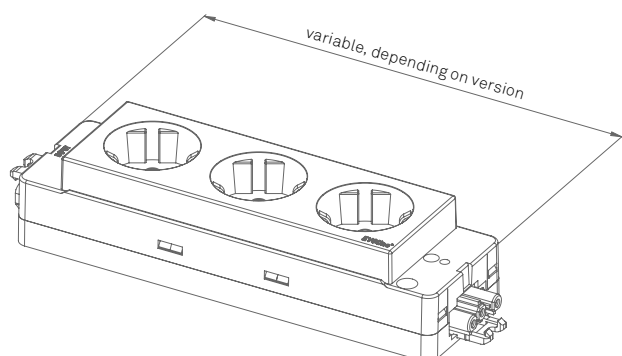




## Connecting systems



Wieland GST 18i3  
Plug



Wieland GST 18i3  
Connector



WAGO WINSTA  
Plug



WAGO WINSTA  
Connector

## Connectivity with EVOLine Express:



## Technical Information for Express Type 910


- Rated voltage: 230 V<sub>AC</sub>
- Rated current: 16 A
- Halogen free housing
- Connectors for direct connection to each other (loop-through wiring)
- sockets redated through 30° (for example, allows the use of power supplies)
- Trough wiring (solid copper wire) 1.5mm<sup>2</sup>
- Low heat and high current carrying capacity through copper Contact rails
- Certified according to DIN VDE 0620-1
- Glow-wire test to IEC 60 695-2-11. Self-extinguishing. Flame retardant
- Each item individually tested with test report
- Test Modes: earth bond test. Continuity test. High voltage test
- socket housing: without screws or bolts




GST18® is a brand of WIELAND Electric GmbH




WINSTA® is a brand of WAGO Kontakttechnik GmbH & Co. KG





powerCON is a brand of Neutrik AG






Description	Picture	Specifications	Order Number
<b>EVOLine Express lateral cover cap</b>  for screw holes (not suitable for Express Type 900 and 907)		Housing Colour black	1591 1830 0400
		Housing Colour red	1591 1830 0500
		Housing Colour green	1591 1830 0700
<b>EVOLine Express Type 910 2 gang Power Bar, VDE</b>  for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free  Dimensions : 46 × 59 × 148 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black	1591 0200 0100
		Housing Colour red	1591 0200 0120
		<b>contact protected</b> Housing Colour black	1591 0200 0110
		Housing Colour red	1591 0200 0130
		<b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black	1591 0200 0200
		Housing Colour red	1591 0200 0220
		<b>contact protected</b> Housing Colour black	1591 0200 0210
		Housing Colour red	1591 0200 0230
		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black	1591 0300 0100
		Housing Colour red	1591 0300 0120
		<b>contact protected</b> Housing Colour black	1591 0300 0110
		Housing Colour red	1591 0300 0130
<b>EVOLine Express Type 910 3 gang Power Bar, VDE</b>  for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free  Dimensions : 46 × 59 × 198 mm		<b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black	1591 0300 0200
		Housing Colour red	1591 0300 0220
		<b>contact protected</b> Housing Colour black	1591 0300 0210
		Housing Colour red	1591 0300 0230

Description	Picture	Specifications	Order Number
<b>EVoline Express Type 910</b> <b>4-fach Power Bar, VDE</b>  for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A halogen-free  Dimensions : 46 × 59 × 248 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>contact protected</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>contact protected</b> Housing Colour black Housing Colour red	   1591 0400 0100 1591 0400 0120  1591 0400 0110 1591 0400 0130    1591 0400 0200 1591 0400 0220  1591 0400 0210 1591 0400 0230




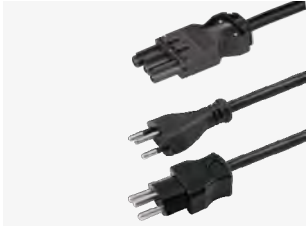

Description	Picture	Specifications	Order Number
<b>EVoline Express Type 910 2 gang Power Bar, BE/FR</b>  for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free  Dimensions : 46 × 59 × 148 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0201 0100 1591 0201 0120    1591 0201 0200 1591 0201 0220
<b>EVoline Express Type 910 3 gang Power Bar, BE/FR</b>  Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free  Dimensions : 46 × 59 × 198 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0301 0100 1591 0301 0120   1591 0301 0200 1591 0301 0220
<b>EVoline Express Type 910 4-fach Power Bar, BE/FR</b>  Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free  Dimensions : 46 × 59 × 248 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0401 0100 1591 0401 0120   1591 0401 0200 1591 0401 0220


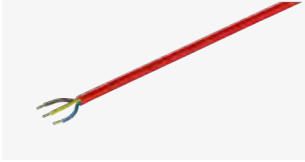










Description	Picture	Specifications	Order Number
<b>EVoline Express Type 910 2 gang Power Bar, CH</b>  Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free  Dimensions : 46 × 59 × 148 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0203 0100 1591 0203 0120    1591 0203 0200 1591 0203 0220
<b>EVoline Express Type 910 3 gang Power Bar, CH</b>  Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free  Dimensions : 46 × 59 × 198 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0303 0100 1591 0303 0120   1591 0303 0200 1591 0303 0220
<b>EVoline Express Type 910 4 gang Power Bar, CH</b>  Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free  Dimensions : 46 × 59 × 248 mm		<b>Wieland GST 18</b>  <b>without contact protection</b> Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  <b>without contact protection</b> Housing Colour black Housing Colour red	  1591 0403 0100 1591 0403 0120   1591 0403 0200 1591 0403 0220

Description	Picture	Specifications	Order Number
<b>EVOLine Express Typ 910 2 gang Power Bar, GB</b>  Rated voltage: 250 V / 50 Hz halogen-free  Dimensions: 46 × 59 × 148 mm		<b>Wieland GST 18</b>  with contact protection Housing Colour black Rated current: 13 A	1591 0206 0110
		with contact protection Housing Colour black Single fuse: 3,15 A	1591 0207 0110
		with contact protection Housing Colour black Single fuse: 5 A	1591 0208 0110
<b>EVOLine Express Typ 910 3 gang Power Bar, GB</b>  Rated voltage: 250 V / 50 Hz halogen-free  Dimensions: 46 × 59 × 198 mm		<b>Wieland GST 18</b>  with contact protection Housing Colour black Rated current: 13 A	1591 0306 0110
		with contact protection Housing Colour black Single fuse: 3,15 A	1591 0307 0110
		with contact protection Housing Colour black Single fuse: 5 A	1591 0308 0110
<b>EVOLine Express Typ 910 4 gang Power Bar, GB</b>  Rated voltage: 250 V / 50 Hz halogen-free  Dimensions: 46 × 59 × 248 mm		<b>Wieland GST 18</b>  with contact protection Housing Colour black Rated current: 13 A	1591 0406 0110
		with contact protection Housing Colour black Single fuse: 3,15 A	1591 0407 0110
		with contact protection Housing Colour black Single fuse: 5 A	1591 0408 0110
<b>EVOLine Express Type 901 3 gang Power Bar</b>  Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free  Dimensions : 39 x 59 x 186 mm		<b>Wieland GST 18</b>  Housing Colour black Housing Colour red	1590 1100 1500 1590 1100 1600

Description	Picture	Specifications	Order Number
<b>EVoline Express Interference Filter</b>  2-pin with plug and socket  Dimensions : 39 × 59 × 188 mm		<b>Wieland GST 18</b>  Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  Housing Colour black Housing Colour red	  1592 0112 7500 1592 0112 7600    1592 0112 7700 1592 0112 7800
<b>EVoline Express RCD Residual current device switch</b>  25 A, sensivity 30 mA with plug and socket  Dimensions : 90 × 59 × 159 mm		<b>Wieland GST 18</b>  Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  Housing Colour black Housing Colour red	  1592 2110 4500 1592 2110 4600    1592 2110 4700 1592 2110 4800
<b>EVoline Express MCB Circuit protection switch</b>  16 A, Characteristic B 2-pole with plug and socket  Dimensions : 90 × 59 × 159 mm		<b>Wieland GST 18</b>  Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  Housing Colour black Housing Colour red	  1592 2110 3500 1592 2110 3600    1592 2110 3700 1592 2110 3800
<b>EVoline Express MCB Circuit protection switch</b>  10 A, Characteristic B 2-pole with plug and socket  Dimensions : 90 × 59 × 159 mm		<b>Wieland GST 18</b>  Housing Colour black Housing Colour red  <b>WAGO WINSTA MIDI</b>  Housing Colour black Housing Colour red	  1592 2110 2500 1592 2110 2600    1592 2110 2700 1592 2110 2800
<b>EVoline Express RCD Residual current device switch / MCB Circuit protection switch</b>  16 A, 30 mA Type A Characteristic B 2-pole with plug and socket  Dimensions : 90 × 59 × 159 mm		<b>Wieland GST 18</b>  Housing Colour black	  1599 0910 9700








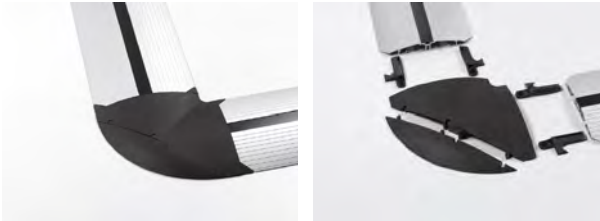
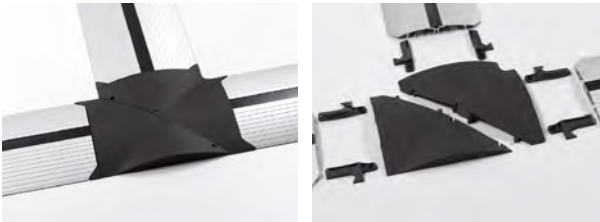
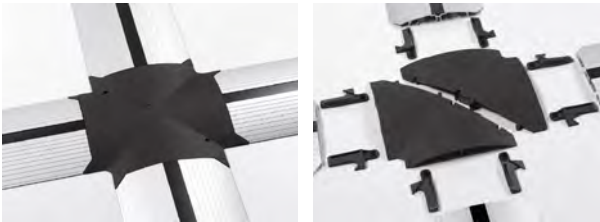



Description	Picture	Specifications	Order Number
<b>EVoline Express Power Cord</b>  Germany, Austria,France with Angled plug and socket connector Colour: black		<b>GST 18 (Connector)</b>  Cable length 3 m Cable length 4 m Cable length 5 m  <b>WAGO WINSTA (Connector)</b>  Cable length 3 m Cable length 4 m Cable length 5 m	  6590 0603 0500 6590 0604 0500 6590 0605 0500    6590 0903 0100 6590 0904 0100 6590 0905 0100
<b>EVoline Express Power Cord</b>  Germany, Austria,France with Angled plug and socket connector Colour: red		<b>GST 18 (Connector)</b>  Cable length 3 m  <b>WAGO WINSTA (Connector)</b>  Cable length 3 m Special lengths from 100 pieces on request	  1590 0603 0600   1590 0903 0200
<b>EVoline Express Power Cord</b>  Great Britain, 13 A with Angled plug and socket connector Colour: black		<b>GST 18 (Connector)</b>  Cable length 3 m	  6591 1603 0500
<b>EVoline Express Power Cord</b>  Switzerland with safety plug and socket connector		<b>GST 18 (Connector)</b>  Cable length 3 m, 10 A Cable length 3 m, 16 A  <b>WAGO WINSTA (Connector)</b>  Cable length 3 m, 10 A	  1590 0623 0500 1590 0663 0500   1590 0923 0100
<b>EVoline Express Power Supply Module with Overload Circuit Breaker</b>  Plug type J (T12) Power Supply Module with resettable overload switch 10 A 3× 1,5 mm² i.e. Switzerland		<b>GST 18 (Connector)</b>  Cable length 3 m	  9332 0911 7200







Description	Picture	Specifications	Order Number
<b>EVOLine Express Connecting cable</b>  Freely configurable cable, Plug and socket.		<b>Cable:</b> Cable 3 x 1,5 mm², black Lenght 1 m (Minimum 0,2 m) Cable extension per m (purchase from 0.1 m)	9331 7920 0000
		Cable 3 x 1,5 mm², red Lenght 1 m (Minimum 0,2 m) Cable extension per m (purchase from 0.1 m)	9331 7930 0000
		<b>Plug:</b> Plug GST18	9331 7940 0000
		Plug WAGO WINSTA MIDI	9331 7950 0000
		Plug Neutrik powerCON	9332 4260 0000
		<b>Connector:</b> Connector GST18	9331 7960 0000
		Connector WAGO WINSTA MIDI	9331 7970 0000
		Connector Neutrik powerCON	9332 4270 0000
		<b>Plug:</b> Plug GST18	1599 0907 7000
		Plug WAGO WINSTA MIDI	1599 0910 9500
<b>EVOLine Express Socket Connector</b>  Severally, without cable.		<b>Connector:</b> Connector GST18	1599 0905 9000
		Connector WAGO WINSTA MIDI	1599 0910 9600

Description	Picture	Specifications	Order Number
Distributor Wieland GST18  250 V, 20 A Input: Plug 3-pole		2x Output: Connector 3-pole Flat Shape with Lock without Mounting clip	6599 0906 8300
		2x Output: Connector 3-pole T-Shape with Lock without Mounting clip	6599 0905 2200
		2x Output: Connector 3-pole h-Shape with Lock without Mounting clip Plug directly into Express sockets	6599 0911 3000
		3x Output: Connector 3-pole with Lock with Mounting plate	1599 0911 7000
		5x Output: Connector 3-pole with Lock with Mounting plate	1599 0911 7100
<b>Y-Cable Distributor</b> <b>Wieland GST18</b>  1x Input, Plug 3-pole, GST18		2x Output, Connector 3-pole, GST18 with Lock without Mounting clip Lenght: 300 mm	6599 0906 6600

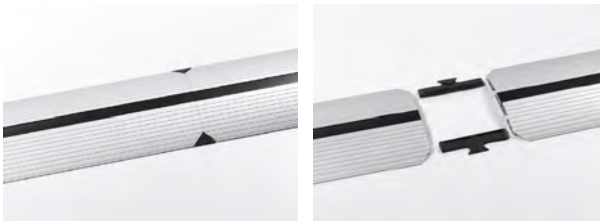
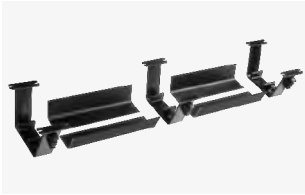
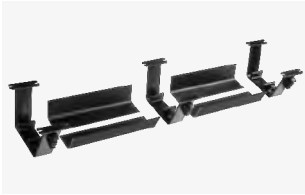


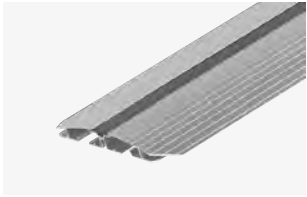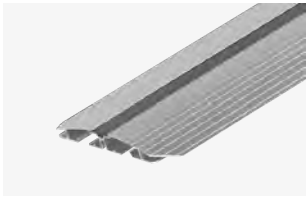


Description	Picture	Specifications	Order Number
<div><b>Distributor</b> <b>WAGO WINSTA</b></div> <div>250 V, 25 A Input: Plug 3-pole</div>		2x Output: Connector 3-pole T-Shape with Lock without Mounting clip	6599 0906 9100
		2x Output: Connector 3-pole h-Shape with Lock with Mounting plate	1599 0911 7600
		3x Output: Connector 3-pole with Lock with Mounting plate	1599 0911 7300
		5x Output: Connector 3-pole with Lock with Mounting plate	1599 0911 7400





Description	Picture	Specifications	Order Number
<b>EVoline Rail</b>  For under desk installation, for the EVoline Express range. Black plastic brackets. Black aluminium profiles		<b>2 black plastic brackets with 2 aluminium profiles</b>  Profile length 165 mm (for 3 gang)  Profile length 215 mm (for 4 gang)	1593 5400 0300  1593 5400 0400
		<b>Individual</b>  1 black plastic brackets for EVoline Express	9331 6230 0000
		1 pair of Aluminium profiles per 100 mm	9331 6210 0000
<b>EVoline Express Module Connector</b>  for a safe connection of plugged EVoline modules (for Express 901/910)		black  red	1591 1830 0100  1591 1830 0200
<b>EVoline Express GST18 latches</b>  Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.		black	1599 0909 6700



Description	Picture		Order Number
<b>Bridge Module Arc 90°</b>  includes 4 Fixing bolts			1593 5090 0600
<b>Bridge Module T</b>  includes 6 Fixing bolts			1593 5090 0500
<b>Bridge Module Cross</b>  includes 8 Fixing bolts			1593 5090 0200
<b>Bridge Module Adaptor WireLane</b>  can also be used as end piece.			1593 5090 0100
<b>Bridge Module Vertical</b>			1593 5090 0400
<b>Bridge Connectors</b>  2 Pieces			1593 5090 0300






Description	Picture	Specifications	Order Number
<b>EVoline Bridge</b>  cable cover made of aluminium for screw fixing, with black trim, without screws		<b>4 CableClips</b>  Length: 500 mm Length: 800 mm Length: 1.200 mm	1593 5010 5000 1593 5010 8000 1593 5011 2000
		<b>8 CableClips</b>  Length: 1.600 mm Length: 2.000 mm	1593 5011 6000 1593 5012 0000
<b>EVoline Bridge</b>  cable cover made of aluminium With double-sided tape with black trim		<b>4 CableClips</b>  Length: 500 mm Length: 800 mm Length: 1.200 mm	1593 5020 5000 1593 5020 8000 1593 5021 2000
		<b>8 CableClips</b>  Length: 1.600 mm Length: 2.000 mm	1593 5021 6000 1593 5022 0000
<b>EVoline WireLane</b>  under desk cable channel made of plastic. The elements can be linked and separated.  Width: 80 mm		Length: 750 – – 1000 mm  Colour: black Colour: lightgrey	6593 5201 0000 6593 5211 0000
<b>EVoline WireLane Strain Relief</b>  in black plastic with two clamps for cable			6593 5290 0100
<b>EVoline CableFlex</b>  Plastic tube for cables. Black		Ø 15 mm, Length 50 m Ø 20 mm, Length: 30 m Ø 25 mm, Length: 20 m	6593 5300 0100 6593 5310 0100 6593 5320 0100
<b>EVoline CableFlex</b> Insertion tool		Ø 15 mm Ø 20 mm Ø 25 mm	6593 5390 0100 6593 5390 0200 6593 5390 0300















Description	Picture	Specifications	Order Number
<b>EVoline Rail</b>  For under desk installation, For EVoline U-Dock and EVoline Express. Bespoke profile lengths available upon request.		<b>for EVoline U-Dock</b>	
		<b>2 black plastic brackets with 2 aluminium profiles</b>	
		Profile length 150 mm	1593 5400 0700
		Profile length 300 mm	1593 5400 0100
		Profile length 500 mm	1593 5400 0200
		<b>3 black plastic brackets with 4 aluminium profiles</b>	
		Profile length 2 x 300 mm	1593 5400 0500
		Profile length 2 x 400 mm	1593 5400 0600
		<b>For EVoline Express</b>	
		<b>2 black plastic brackets with 2 aluminium profiles</b>	
		Profile length 165 mm (for 3-gang)	1593 5400 0300
		Profile length 215 mm (for 4-gang)	1593 5400 0400
		<b>Individual</b>	
		1 black plastic brackets for EVoline Express	9331 6230 0000
		1 black plastic brackets for EVoline U-Dock	9331 6220 0000
		1 Pair Aluminium profiles per 100 mm	9331 6210 0000




Description	Picture	Specifications	Order Number
<b>Cable Passage EVoline Port</b>  Aluminium housing, silver anodised Without modules  Mounting hole Ø 102 mm		Rocking cover and collar made of silver lacquered plastic	1593 1002 5301
		Rocking cover and collar made of black lacquered plastic	1593 1003 2601
		Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match	1593 1003 2701
<b>Cable Outlet-Modul</b>  1 cable passage  installation dimensions: 50 × 50 mm		Ø 8 mm	9331 3790 0000
		Ø 12 mm Ø 17 mm Other Ø on request	9331 0560 0000 9331 1670 0000
<b>Cable Outlet-Modul</b>  2 cable passages  Installation dimensions: 50 × 50 mm		Ø 8 mm	9331 3800 0000
		Ø 12 mm Other Ø on request	9331 1930 0000
<b>Cable Guide-Modul</b> for EVoline Port Clamp for 3 cables 2x 8 mm 1x 12 mm Colour: black  Installation dimensions: 25 x 50 mm			9331 3600 0000

Description	Picture	Specifications	Order Number
<p><b>Empty Floor Outlet</b></p> <p>cable passage for installation in double and cavity floors, cover with bracket for EVOLine WireLane.</p> <p>Installation dimensions: Ø 125 mm</p>		black lightgrey	1594 9000 0000 1594 9100 0000
<p><b>Floor Outlet</b></p> <p>with electrical socket insert</p> <p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug GST18, cover with bracket for EVOLine WireLane</p> <p>Installation dimensions: Ø 125 mm</p>		Cover black Cover lightgrey	1594 9000 0100 1594 9100 0100

Description	Picture	Specifications	Order Number
<b>Mounting Clamp</b>  twist-proof including non-slip covering Colour: black for profiles: Dock, U-Dock, R-Dock		Span width 8 – 40 mm  Span width 8 – 40 mm, 2×  Span width 40 – 75 mm  Span width 40 – 75 mm, 2×	1599 0902 1200  1599 0902 0500  1599 0902 1300  1599 0902 1000
<b>Mounting Clamp</b>  twist-proof including non-slip covering Colour: white for profiles: Dock, U-Dock, R-Dock		Span width 8 – 40 mm  Span width 8 – 40 mm, 2×  Span width 40 – 75 mm  Span width 40 – 75 mm, 2×	1599 0909 3300  1599 0909 5600  1599 0909 3900  1599 0909 5700
<b>Stainless Steel Mounting Clamp</b>  twist-proof desk clamp installed and secured with allen screws. For profiles: Dock, U-Dock, R-Dock, V-Dock		Span width 18 – 25 mm	1599 0909 1500
<b>Mounting set for under cabinet installation</b>  consists of two EVOLine Dock brackets with wood screws screw: 3.5 x 15 mm			1599 0903 8300
<b>Mounting set for desk installation</b>  consists of two EVOLine Dock brackets with wing nut screws screw: M4 x 40 mm			1599 0903 8200

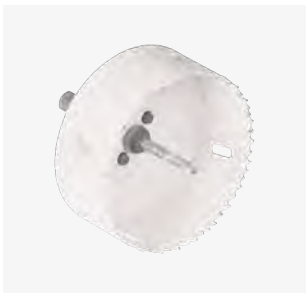Description	Picture	Specifications	Order Number
<b>Stainless Steel Pillar</b>  Steel pillar for EVoline Docks consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock		Material : Stainless steel for surface thickness up to 50 mm	1599 0906 0700
<b>Angle Profile</b>  for fixing of EVoline V-Dock		Length: 100 mm  Length: 60 mm	1599 0908 4400  1599 0909 6400
<b>EVoline Quicklock Pro</b>  fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVoline Dock, EVoline R-Dock		Length: 100 mm without bracket  length: 150 mm includes bracket for Wire-Lane connection  length: 200 mm includes bracket for EVoline WireLane connection	1599 0910 8500  1599 0910 8300  1599 0910 8400
<b>Mounted on product</b>			
		profile min. length: 100 mm price unit: 100 mm	9331 6700 0000
		Fastening element	9332 0300 0000
		WireLane bracket usable from 150 mm profile length	9331 6720 0000

Description	Picture	Specifications	Order Number
<b>Double Sided Strip for EVoline Dock Square</b>  2× Double Sided Strips Removable without residue.			9332 1050 0000
<b>EVoline Rubber gasket</b>  fits under the collar of the EVoline Port.			1599 0903 9100
<b>EVoline Laptop Secure</b>  Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.		Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm	9331 3140 0000
<b>EVoline Laptop Secure</b>  Sturdy attachment loop for standard laptop theft protection Such as Kensington Lock.		Silver-colored	9331 6030 0000
<b>EVoline Hole Saw</b>  For precise installation.		Mounting hole Ø 102 mm (for EVoline Port)  Mounting hole Ø 83 mm (for EVoline Square80)  Mounting hole Ø 54 mm (for EVoline One)	1599 0901 7000  1599 0910 1000  1599 0911 3900
<b>EVoline Unlocking Tool for interchangeable modules</b>			6599 0911 1300

Description	Picture	Specifications	Order Number
<b>EVoline sample display</b>  Fully functional, equipped with EVoline BackFlip, Circle80, FlipTop Push S, FrameDock, Qi Charger, One, Square80. With carrier bag made of robust tarpaulin incl. shoulder strap. Without connecting cable.		VDE	WM65 9909 1157
		International	WM65 9909 1161
		Bag separate, without display.	WM65 9909 1169
		Felt insert for bag, for carrying smaller displays or products.	WM65 9909 1181
<b>EVoline sample display One</b>  Sample display for installation demonstration. With 3 EVoline One sockets: surface-mounted, flush-mounted, with cover.		VDE	WM65 9909 1163
		UK	WM65 9909 1164
		B/F	WM65 9909 1165
		CH 10 A	WM65 9909 1166
<b>EVoline sample display One Upholstery installation</b>  Sample display for installation demonstration of the EVoline One in an upholstered piece of furniture.		Flat upholstery	WM65 9909 1179
		High upholstery	WM65 9909 1180



# EVoline®

**Schulte Elektrotechnik GmbH & Co. KG**

Juengerstrasse 21  
D-58515 Luedenscheid  
Germany

Telephone +49 23 51 / 94 81-0  
Fax +49 23 51 / 4 26 58

E-Mail [info@schulte.com](mailto:info@schulte.com)  
Internet [www.evoline.com](http://www.evoline.com)

